


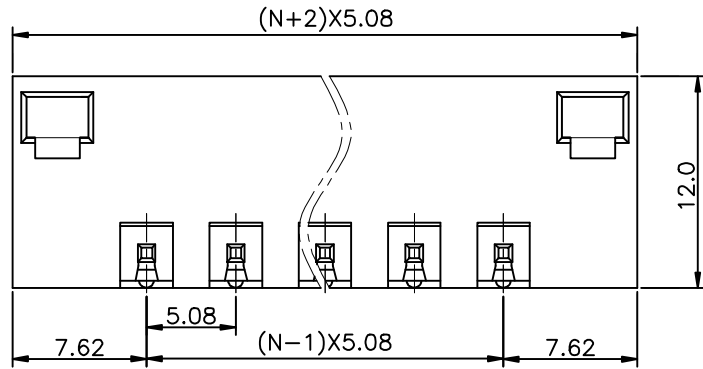


1 2 3 4 5 6 7 8 9

F  
E  
D  
C  
B  
A

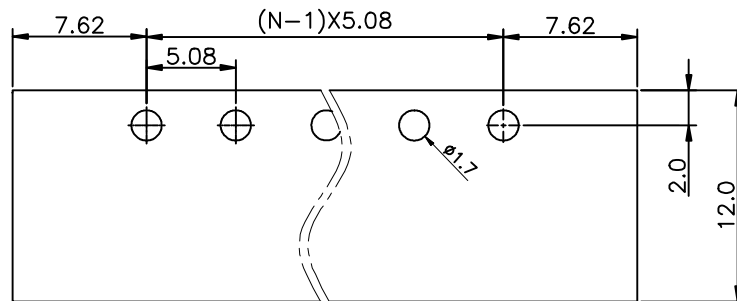


Specifications  
 Voltage rating: 300VAC  
 Current rating: 16A  
 Contact resistance: 20mΩ(max)  
 Insulation resistance: 5000MΩ/1000V  
 Withstanding Voltage: AC 2500V(1min)  
 Mechanical:  
 Torque: /  
 Operating temperature: -40°C to +105°C  
 Materials  
 Contact Material: Brass  
 Insulator Material: UL 94V-0 PA66  
 All materials must meet GREENCONN hazardous substances control standards.

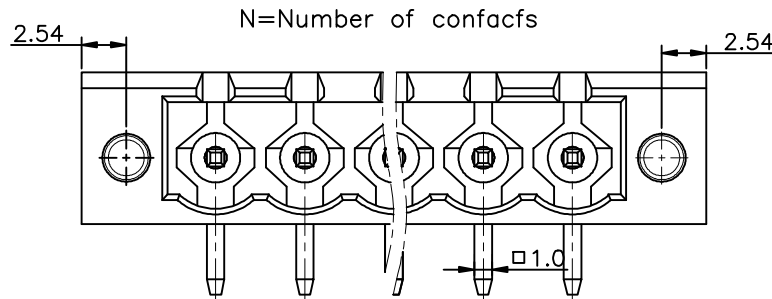

P.C.B. LAYOUT

### Ordering Information

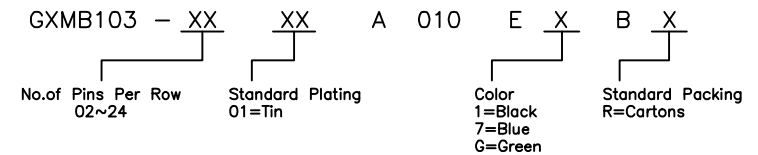

**Greenconn**  
 Website: www.greenconn.com  
 E-mail: sales@greenconn.com

REV. A	UNIT. mm	SCALE. 1:1	3RD.ANG PROJ.	PAGE. 1/1
--------	----------	------------	---------------	-----------

GENERAL TOLERANCE	
X. ±5.0'	X. ±0.50
.X' ±3.0'	.X ±0.30
.XX' ±2.0'	.XX ±0.20
.XXX' ±1.0'	.XXX ±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO. GXMB103-CA010EB
PART NO. GXMB103-XXXXA010EXB X

TITLE. Pitch5.08mm-series
------------------------------

1 2 3 4 5 6 7 8 9