


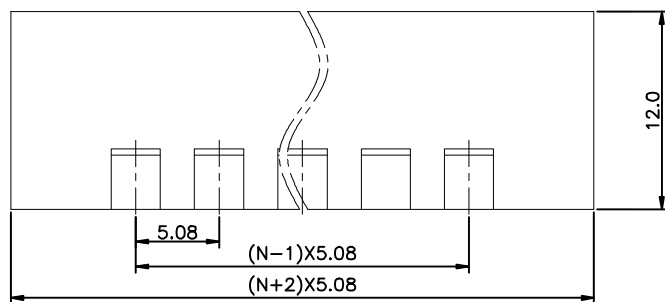


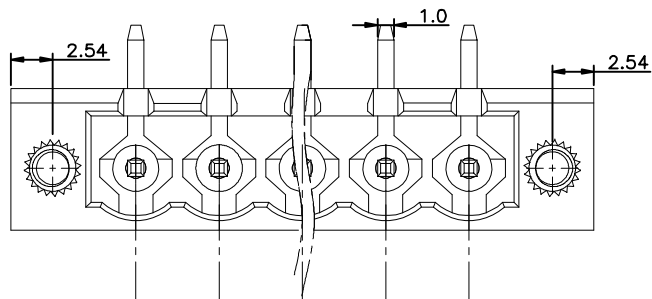

N=Number of contacts

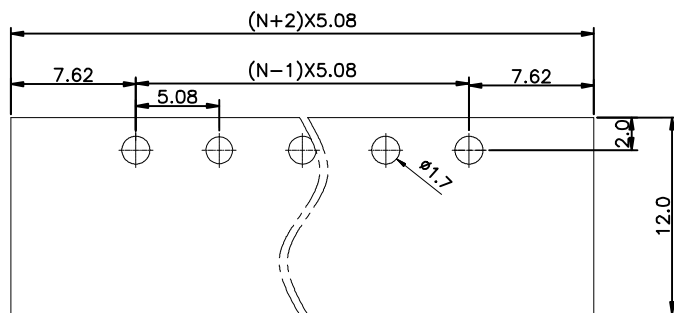

P.C.B LAYOUT



Specifications
 Voltage rating:300VAC
 Current rating:16 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min)
 Test time:60sec/1pcs
 wire range: /
 Mechanical:
 Torque:/
 Operating temperature:-40°C to+105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

Ordering Information

GXMB103 - XX XX A 011 E X B X


No.of Pins Per Row 02~24
 Standard Plating 01=Tin
 Color 1=Black 7=Blue G=Green
 Standard Packing R=Cartons



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD.ANG
 PROJ.



GENERAL TOLERANCE

X.±5.0° X.±0.50
 .X'±3.0° .X±0.30
 .XX'±2.0° .XX±0.20
 .XXX'±1.0° .XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GXMB103-CA011EB

PART NO.

GXMB103-XXXXA011EXBX

TITLE.

Pitch5.08mm-series主体孔反向