

1 2 3 4 5 6 7 8 9

F


E

D

C

B


A

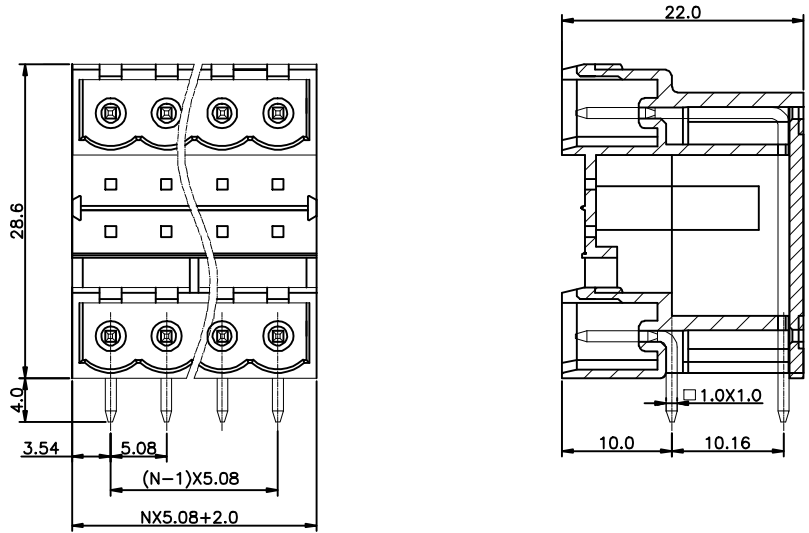

Specifications
 Voltage rating:300VAC
 Current rating: 16A
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 withstanding Voltage: AC 2500V(1min)
Mechanical:
 Torque:/
 Operating temperature:-40°C to+105°C
Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

N=Number of contacts

P.C.B. LAYOUT

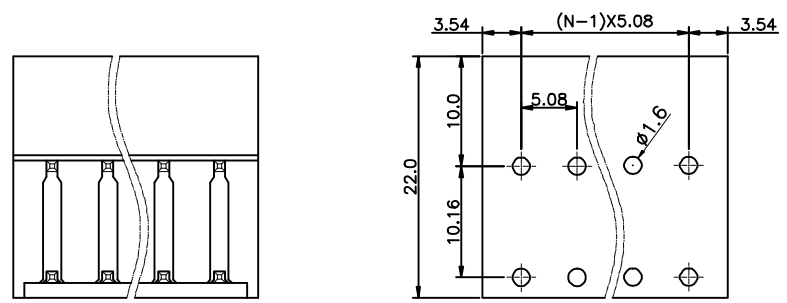

Ordering Information

GXMB201 - XX XX A 003 E X B X
 No.of Pins Per Row 02~24 Standard Plating 01=Tin Color 1=Black 7=Blue G=Green Standard Packing R=Cartons

 Website:www.greenconn.com E-mail:sales@greenconn.com	3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. GXMB201-CA003EB	TITLE. Pitch5.08mm-series
	 PAGE. 1/1	X.±5.0'	X.±0.50				
REV. A	UNIT. mm	SCALE. 1:1	.X'±3.0'	.X±0.30	APPROVED:	DATE:	PART NO. GXMB201-XXXXA003EXB
			.XX'±2.0'	.XX±0.20			
			.XXX'±1.0'	.XXX±/			

1 2 3 4 5 6 7 8 9