

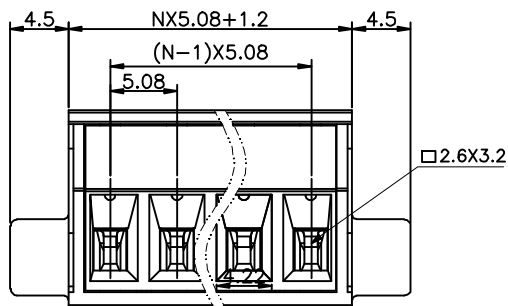


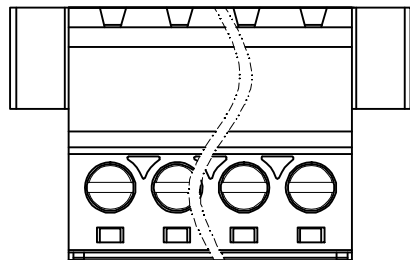

N=Number of contacts

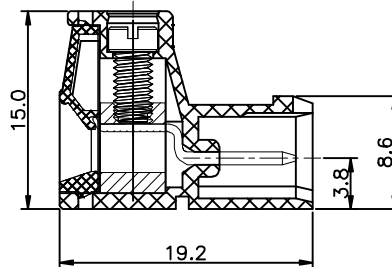

Specifications
 Voltage rating:300VAC
 Current rating: 16 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min) Test time:60sec/1pcs
 Wire range:12-26AWG
 Mechanical:
 Torque:5.0kgf.cm/M3
 Operating temperature:-40°C to+105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN hazardous substances control standards.

Ordering Information

GXMZ101 - XX XX A 002 E X B X


No. of Pins Per Row 02~24 Standard Plating 01=Tin Color 1=Black 6=Grey 7=Blue G=Green Standard Packing R=Cartons



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD.ANG
 PROJ.



GENERAL TOLERANCE

X.'±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GXMZ101-CA002EB

PART NO.

GXMZ101-XXXXA002EXBX

TITLE.

Pitch5.08mm-series