

1 2 3 4 5 6 7 8 9

F



E

D


C

B

A

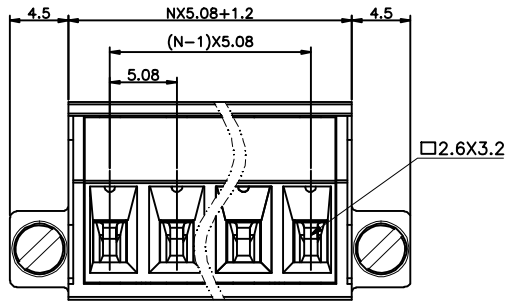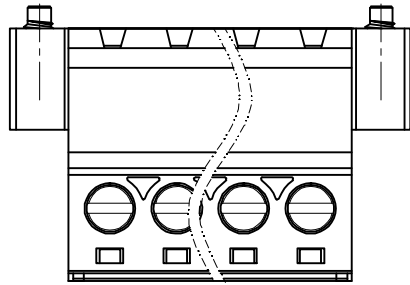

N=Number of contacts

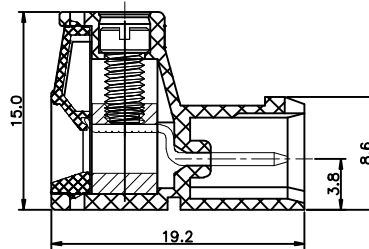

Technical Data

Material:
 Contact(metal housing): Copper Alloy Ni plated.
 Terminal screw: Steel galvanized with Cr3+ plated
 Surface of solder fail: Copper Alloy Tin plated.
 Insulator body(housing):Polyamide(UL94V-0)
Electrical
 Voltage rating:300VAC
 Current rating: 16 Amps/way max
 Contact resistance: 20mΩ(max)
 Withstanding Voltage: 2500VAC(1min) Test time:60sec/1pcs
 Wire range: 12-26AWG
Mechanical:
 Torque: 5.0kgf.cm/M3
 Operating temperature:-40°C to +105°C
 Soldering reliability:
 Test temperature:250°C±10°C
 5 seconds max
 All materials must meet GREENCONN hazardous substances control standards.

Ordering Information

GXMZ101 - XX XX A 003 E X B X

No. of Pins Per Row 02~24 Standard Plating 01=Tin Color 1=Black 6=Grey 7=Blue G=Green Standard Packing R=Cartons



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV.	UNIT.	SCALE.
A	mm	1:1

3RD.ANG PROJ.

 PAGE. 1/1

GENERAL TOLERANCE

X. ±5.0'	X. ±0.50
.X' ±3.0'	.X ±0.30
.XX' ±2.0'	.XX ±0.20
.XXX' ±1.0'	.XXX ±/

DESIGNED:
 CHECKED:
 APPROVED:

DATE:
 DATE:
 DATE:

DWG. NO.

GXMZ101-CA003EB

PART NO.

GXMZ101-XXXXA003EXBX

TITLE.

Pitch5.08mm-series

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A