

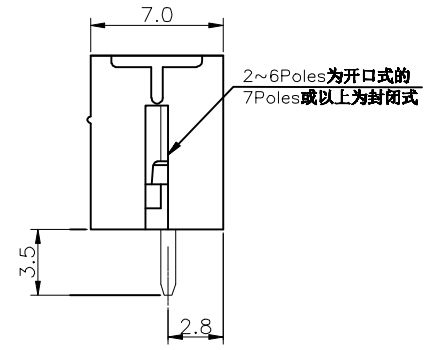


1 2 3 4 5 6 7 8 9


F
E
D
C
B
A

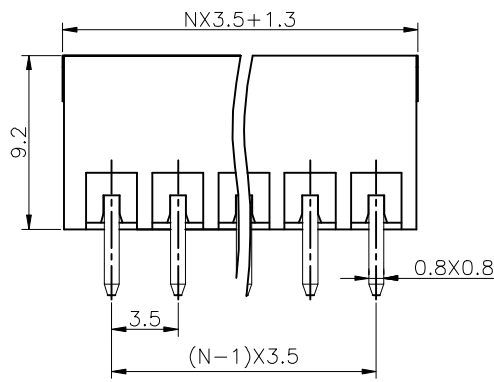

Specifications
 Voltage rating:300VAC
 Current rating:12 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min)
 Test time:60sec/1pcs
 wire range: /
 Mechanical:
 Torque:/
 Operating temperature:-40°C to+105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

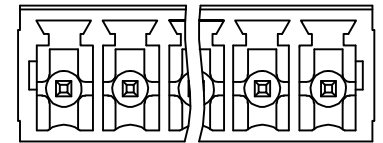


N=Number of conctacs

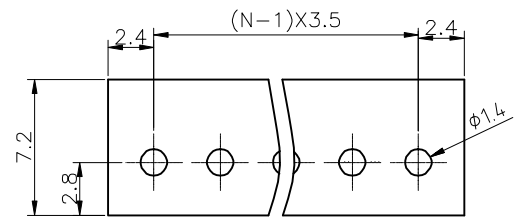

P.C.B LAYOUT

Ordering Information

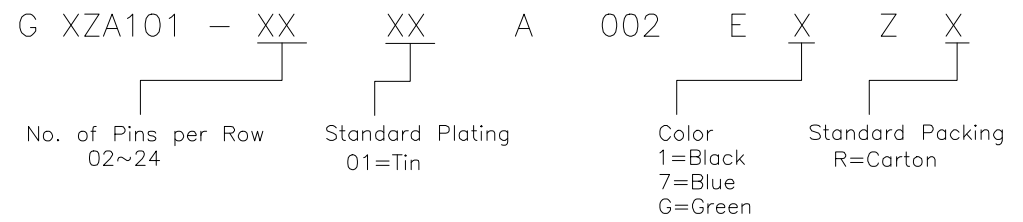

<p>Website:www.greenconn.com E-mail:sales@greenconn.com</p>	3RD.ANG PROJ. 	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. GXZA101-CA2EZ	TITLE. pitch 3.5mm Vertical series
		X:±5.0'	X.±0.50				
REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1	.X'±3.0'	.X±0.30	PART NO. GXZA101-XXXXA002EXZX	
				.XX'±2.0'	.XX±0.20		
				.XXX'±1.0'	.XXX±/		

1 2 3 4 5 6 7 8 9