
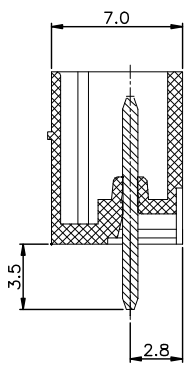


1 2 3 4 5 6 7 8 9


F

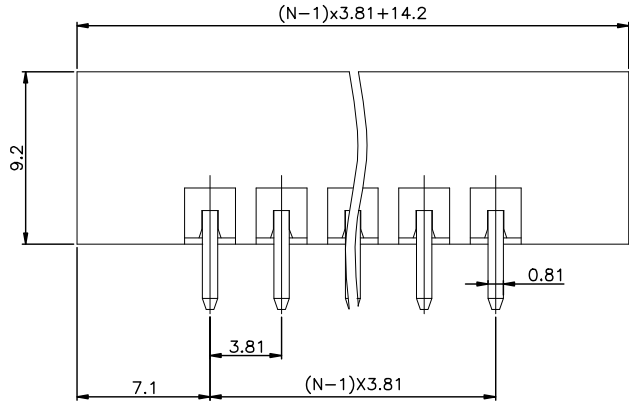

Specifications  
 Voltage rating:300VAC  
 Current rating:12 Amps/way max  
 Contact resistance: 20mΩ(max)  
 Insulation resistance: 5000MΩ/1000V  
 Withstanding Voltage: 2500VAC(1min)  
 Test time:60sec/1pcs  
 wire range: /  
 Mechanical:  
 Torque:/  
 Operating temperature:-40°C to+105°C  
 Materials  
 Contact Material:Brass  
 Insulator Material: UL 94V-0 PA66  
 All materials must meet GREENCONN  
 hazardous substances control standards.

E

D

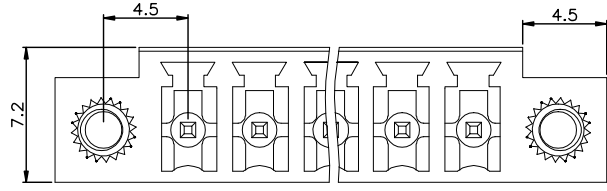


N=Number of contacts

C

### Ordering Information



B

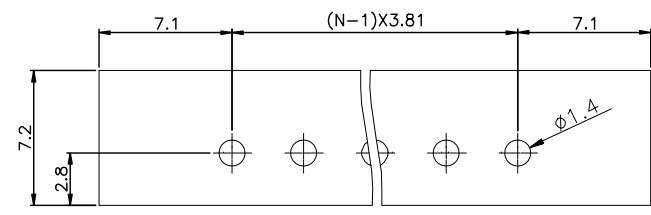

P.C.B LAYOUT

A

**Greenconn**  
 Website:www.greenconn.com  
 E-mail:sales@greenconn.com

|        |          |            |               |                    |           |       |                              |                               |
|--------|----------|------------|---------------|--------------------|-----------|-------|------------------------------|-------------------------------|
| REV. B | UNIT. mm | SCALE. 1:1 | 3RD.ANG PROJ. | GENERAL TOLERANCE  | DESIGNED: | DATE: | DWG. NO. GXZA101-CA007       | TITLE. 3.81mm Vertical Series |
|        |          |            |               | X:±5.0' X:±0.50    | CHECKED:  | DATE: | PART NO. GXZA101-XXXXA007EXB |                               |
|        |          |            | PAGE. 1/1     | .X'±3.0' .X±0.30   | APPROVED: | DATE: |                              |                               |
|        |          |            |               | .XX'±2.0' .XX±0.20 |           |       |                              |                               |
|        |          |            |               | .XXX'±1.0' .XXX±/  |           |       |                              |                               |

M9

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A