



1 2 3 4 5 6 7 8 9


F




P.C.B LAYOUT

Specifications
 Voltage rating: 300VAC
 Current rating: 42 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min)Test time:60sec/1pcs
Mechanical:
 Torque: /
 Operating temperature: -40°C to +105°C
Materials
 Contact Material: Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN hazardous substances control standards.

D

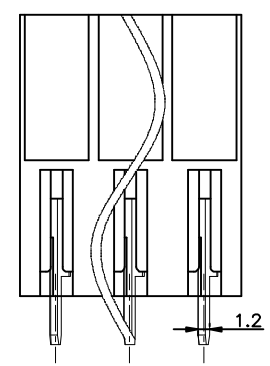

N=Number of contacts

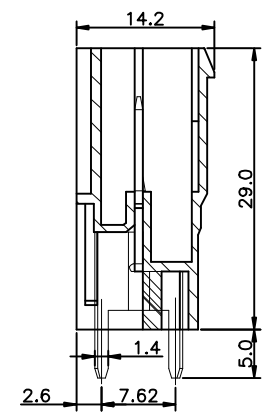

Ordering Information

GXZA120 - XX XX A 001 E X B X

No. Of Pins Per Row 02~24 Standard Plating 01=Tin Color 1=Black G=Green 7=Blue 6=Grey Standard Packing R=Cartons

A

 Website: www.greenconn.com E-mail: sales@greenconn.com	3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. GXZA120-CA001EB	TITLE. Pitch 7.62mm Series
	 PAGE. 1/1	X. ±5.0'	X. ±0.50				
REV. A	UNIT. mm	SCALE. 1:1	.X' ±3.0'	.X ±0.30	APPROVED:	DATE:	
			.XX' ±2.0'	.XX ±0.20			
			.XXX ±1.0'	.XXX ±/			

1 2 3 4 5 6 7 8 9