
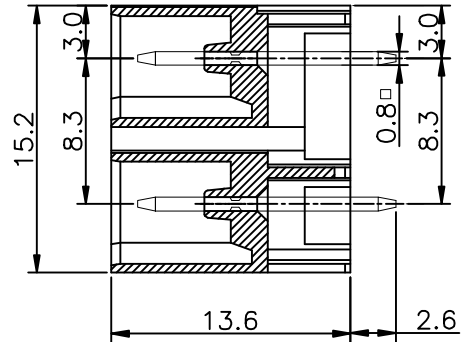


1 2 3 4 5 6 7 8 9

F

E

D

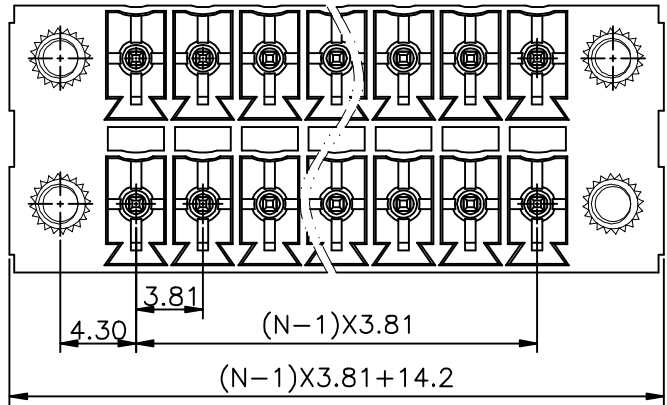


Specifications
 Voltage rating: 300VAC
 Current rating: 12A
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: AC 2500V(1min)
 Mechanical:
 Torque: /
 Operating temperature: -40°C to +105°C
 Materials
 Contact Material: Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN hazardous substances control standards.

N=Number of contacts


C

B

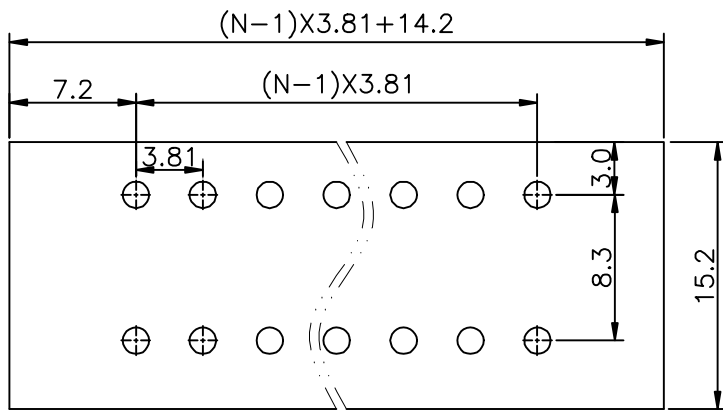

P.C.B. LAYOUT

Ordering Information

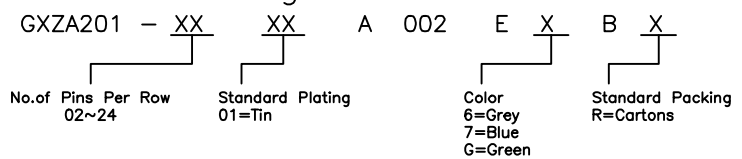

A

<p>Website: www.greenconn.com E-mail: sales@greenconn.com</p>	3RD.ANG PROJ. 	GENERAL TOLERANCE		DESIGNED: CHECKED: APPROVED:	DATE: DATE: DATE:	DWG. NO. GXZA201-CA002EB PART NO. GXZA201-XXXXA002EXBX	TITLE. Pitch3.81mm-series
		X.±5.0' X.±0.50 .X'±3.0' .X±0.30 .XX'±2.0' .XX±0.20 .XXX'±1.0' .XXX±/	REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1				

1 2 3 4 5 6 7 8 9