



1 2 3 4 5 6 7 8 9


F

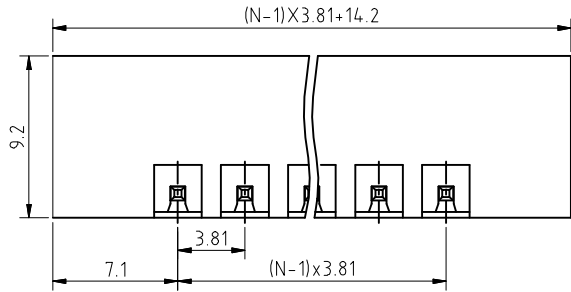

Specifications  
 Voltage rating:300VAC  
 Current rating:12 Amps/way max  
 Withstanding Voltage: 2500VAC(1min)  
 Test time:60sec/1pcs  
 wire range: /  
 Mechanical:  
 Torque:/  
 Operating temperature:-40°C to+105°C  
 Materials  
 Contact Material:Brass  
 Insulator Material: UL 94V-0 PA66  
 All materials must meet GREENCONN  
 hazardous substances control standards.

E


D

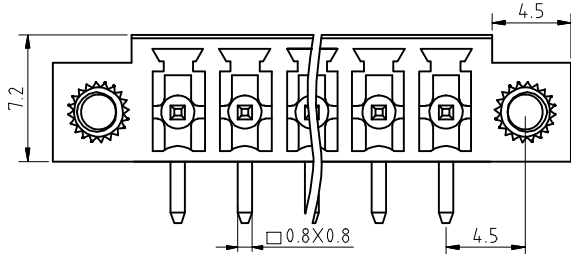

N=Number of contacts


C

B

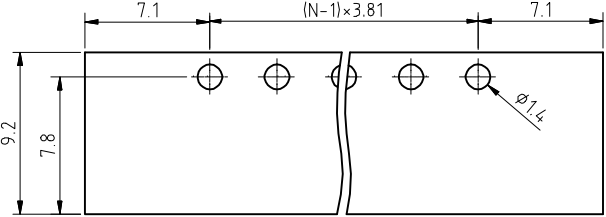

P.C.B. LAYOUT

### Ordering Information

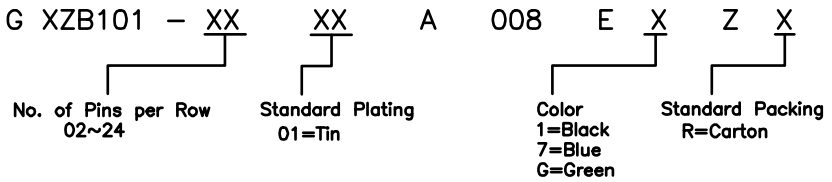

A

 Website:www.greenconn.com E-mail:sales@greenconn.com			3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED: CHECKED: APPROVED:	DATE: DATE: DATE:	DWG. NO.	TITLE. pitch 3.81mm - Right Angle Auricled series
				X:±5.0'	X:±0.50			GXZB101-CA008EZ	
REV.	UNIT.	SCALE.	PAGE. 1/1	.X'±3.0' .XX'±2.0' .XXX'±1.0'	.X±0.35 .XX±0.25 .XXX±/			PART NO.	
01	mm	1:1				GXZB101-XXXXA008EXX			

1 2 3 4 5 6 7 8 9