

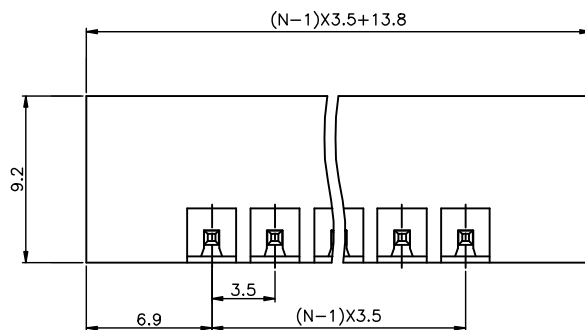


SECTION:A-A

Specifications
 Voltage rating:300VAC
 Current rating:12 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min)
 Test time:60sec/1pcs
 wire range: /
 Mechanical:
 Torque:/
 Operating temperature:-40°C to+105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

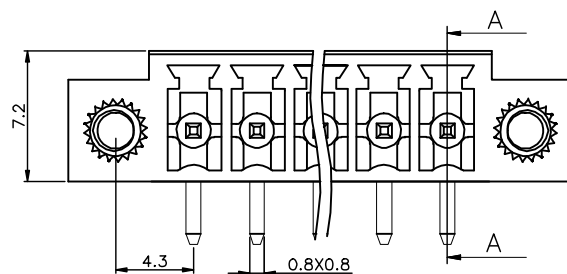

N=Number of conctacs

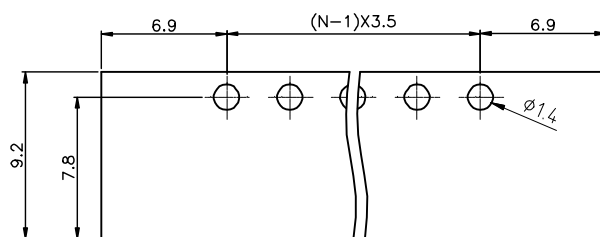

P.C.B LAYOUT

Ordering Information

G XZB105 - XX XX A 001 E X Z X

No. of Pins per Row 02~24
 Standard Plating 01=Tin

 Color 1=Black 7=Blue G=Green
 Standard Packing N=PE Bag Selective Packing R=Carton



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1
 3RD.ANG PROJ. PAGE. 1/1

GENERAL TOLERANCE

X:±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GXZB105-CA1EZ

PART NO.

GXZB105-XXXXA001EXZX

TITLE.

Series3.5mm Right Angle Type