
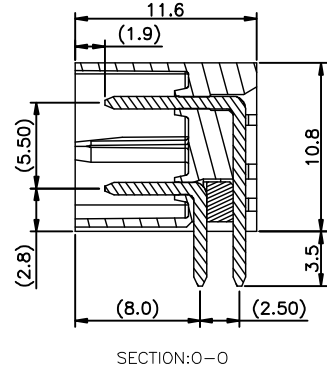




1 2 3 4 5 6 7 8 9

F

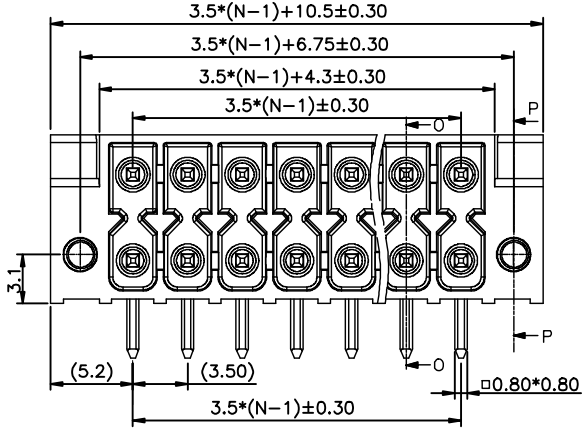


Specifications  
 Voltage rating:150V  
 Current rating:8 Amps  
 Contact resistance: 20mΩ(max)  
 Withstanding Voltage: 1.3KV(1min)  
 Test time:60sec/1pcs  
 wire range: /  
 Mechanical:  
 Torque:/  
 Operating temperature:-40°C to+115°C  
 Materials  
 Contact Material:Brass  
 Insulator Material: UL 94V-0 PA66  
 All materials must meet GREENCONN hazardous substances control standards.

D

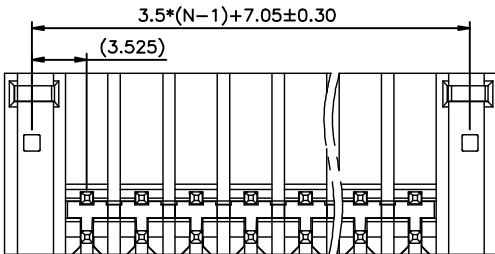

N=Number of contacts

C

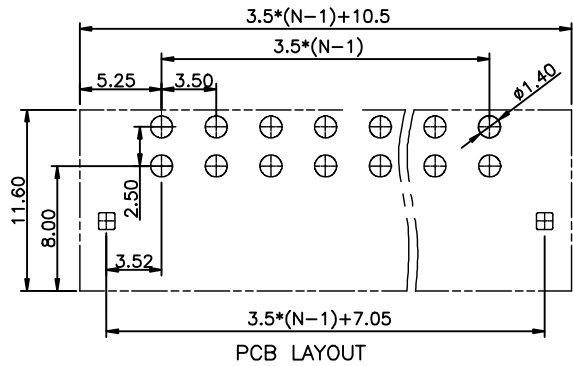

### Ordering Information

G XZB201 - XX XX A 006 E X B X

No. Of Pins Per Row 02~20      Standard Plating 01=Tin      Color 1=Black 2=White 6=Grey 7=Blue A=Orange G=Green      Standard Packing A=Box

A

<p>Website:www.greenconn.com E-mail:sales@greenconn.com</p>			3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. GXZB201-CA006EB	TITLE. NR3.5mm B type 90° with flange Series
				X.±5.0'	X.±0.30				
REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1	.X'±3.0'	.X±0.25	APPROVED:	DATE:	PART NO. GXZB201-XXXXA006EXBX	
				.XX'±2.0'	.XX±0.15				
				.XXX'±1.0'	.XXX±0.10				

1 2 3 4 5 6 7 8 9