



1 2 3 4 5 6 7 8 9

F




E

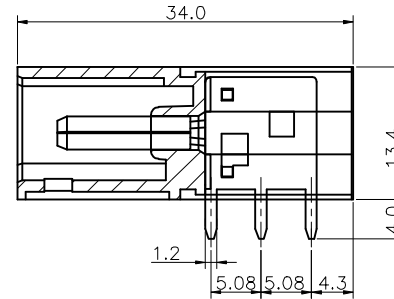


Specifications
Voltage rating:300VAC
Current rating:57 Amps/way max
Contact resistance: 20mΩ(max)
Insulation resistance: 5000MΩ/1000V
Withstanding Voltage: 2500VAC(1min)
Test time:60sec/1pcs
wire range: /
Mechanical:
Torque:/
Operating temperature:-40°C to+105°C
Materials
Contact Material:Brass
Insulator Material: UL 94V-0 PA66
All materials must meet GREENCONN
hazardous substances control standards.

D



N=Number of Contacts

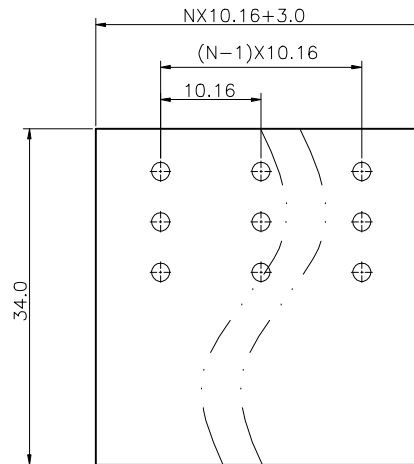

PCB LAYOUT(±0.05)

Ordering Information

G XZB301 - XX XX A 001 E X Z X
No. of Pins per Row 02~24 Standard Plating 01=Tin Color 1=Black 6=Grey 7=Blue G=Green Standard Packing R=Carton

A



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD.ANG
PROJ.
3RD.ANG
PROJ.

GENERAL TOLERANCE

X.±3.0° X.±0.50
.X.±2.0° .X.±0.30
.XX.±1.5° .XX.±0.25
.XXX.±1.0° .XXX.±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GXZB301-CA001EZ

PART NO.

GXZB301-XXXXA001EXZX

TITLE.

Pitch 10.16mm 90° DIP Series

1 2 3 4 5 6 7 8 9