
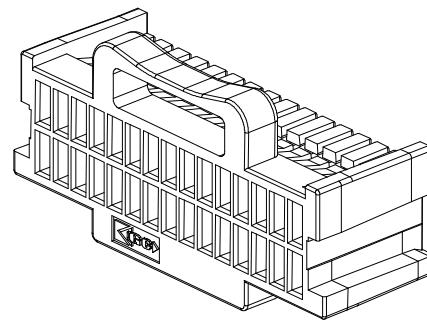


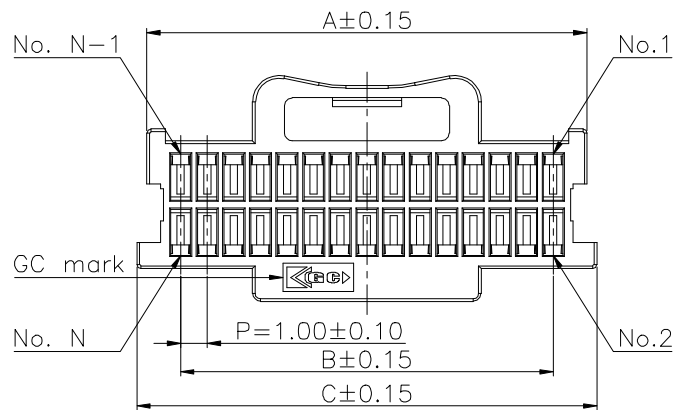

Specifications

Current Rating: 1.0Amp/Pin(26&28AWG)
0.9Amp/Pin(30AWG)
0.7Amp/Pin(32AWG)

Voltage Rating: 100V AC/DC.

Insulation Resistance: 500MΩ Min.




Dielectric Withstanding Voltage: 300V AC.

Contact Resistance: 30mΩ Max.

Operating Temperature: -35°C to +85°C.

Insulator Material: Thermoplastic, UL 94V-0
PBT or the equivalent material.

All materials must meet Greenconn
hazardous substances control standards.

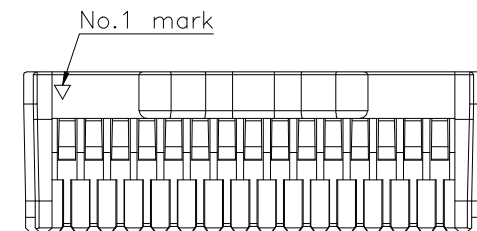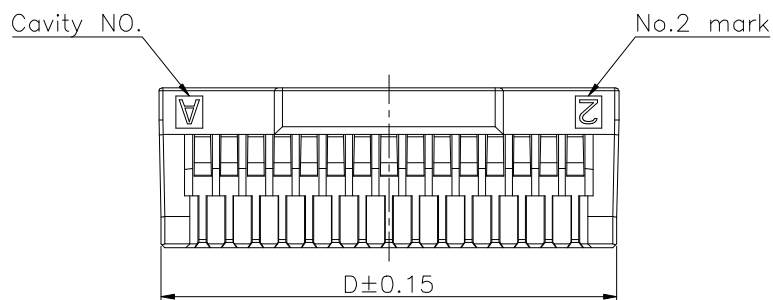

No. of Contacts(N)	Dimension Information			
	A	B	C	D
20	11.54	9.00	12.28	12.13
30	16.54	14.00	17.28	17.13
40	21.54	19.00	22.28	22.13
50	26.54	24.00	27.28	27.13

Ordering Information

H WF28-ECD001-2X XX -A1 AD - N

No. Of Pins Per Row 10/15/20/25 Insulator Material/Color AD=PBT/Nature Standard Packing N=PE bag



REV. A UNIT. mm SCALE. 4:1

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE

X'±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

HWF28-ECD001-2-A1-N

PART NO.

HWF28-ECD001-2XXX-A1AD-N

TITLE.

Housing of 1.00mm pitch
double row crimp socket