


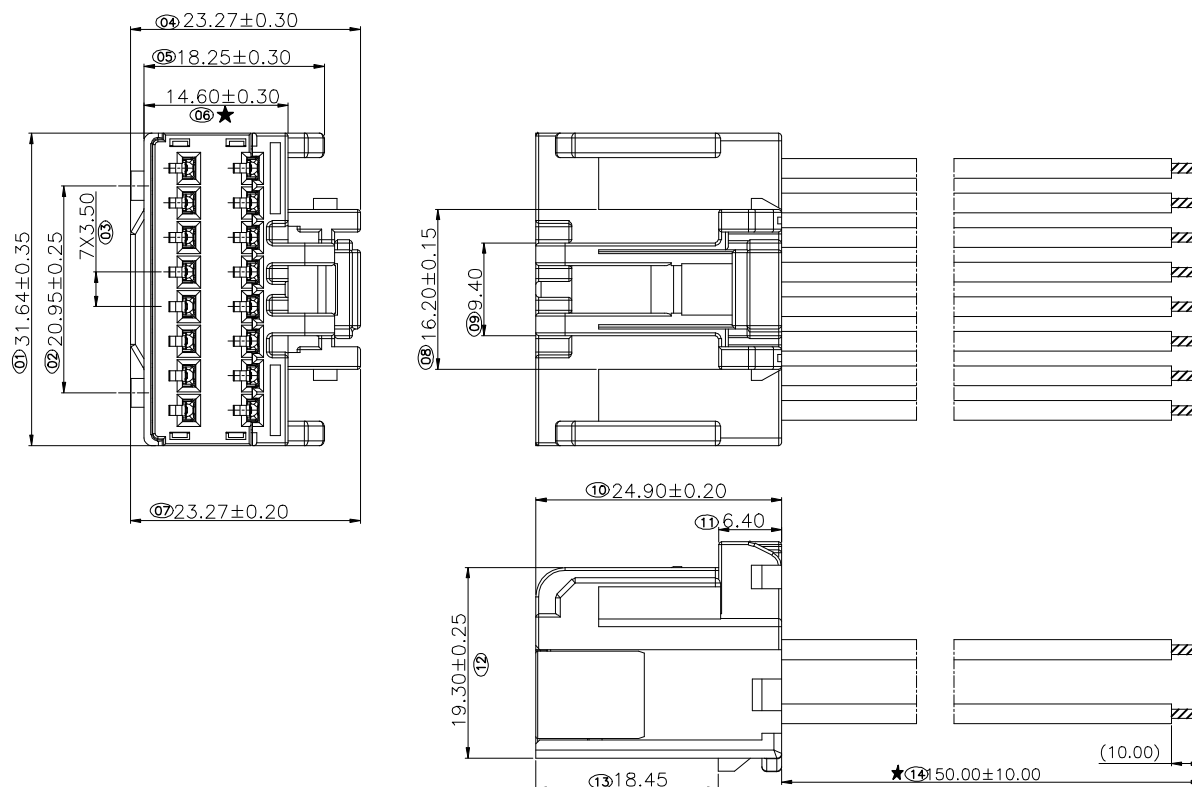

Specifications

Current Rating: 3.0Amp.

Insulation Resistance: 1000MΩMin.

Dielectric Withstanding Voltage: 600VAC.

Contact Resistance: 20mΩMax.

Operating Temperature: -40°C to +105°C.

Materials

Contact Material: Copper alloy

Nickel underplated all over 50~100u" Tin plated 40~100u".

Insulator Material: Temperature Thermoplastic, UL 94V-0 PBT or the equivalent material.

★ All materials must meet GREENCONN hazardous substances control standards.

★: Critical Characteristics.

indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications.

★: Safety Features

indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government.

Ordering Information

LZP32XX - XX 0150 A 18

No. of Pins per Row Standard Plating
08

P4=Nickel underplated
over all 50~100u".
tin plated 40~100u" over all

Cable Length
0150=150mm


Wire Spec
18=18 AWG



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 5:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X: ±5.0° X: ±0.30

.X: ±3.0° .X: ±0.25

.XX: ±2.0° .XX: ±0.15

.XXX: ±1.0° .XXX: ±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

LZP3208-CP40150A18

PART NO.

LZP3208-P40150A18

TITLE.

3.50 PITCH FEMALE
CONNECTOR