


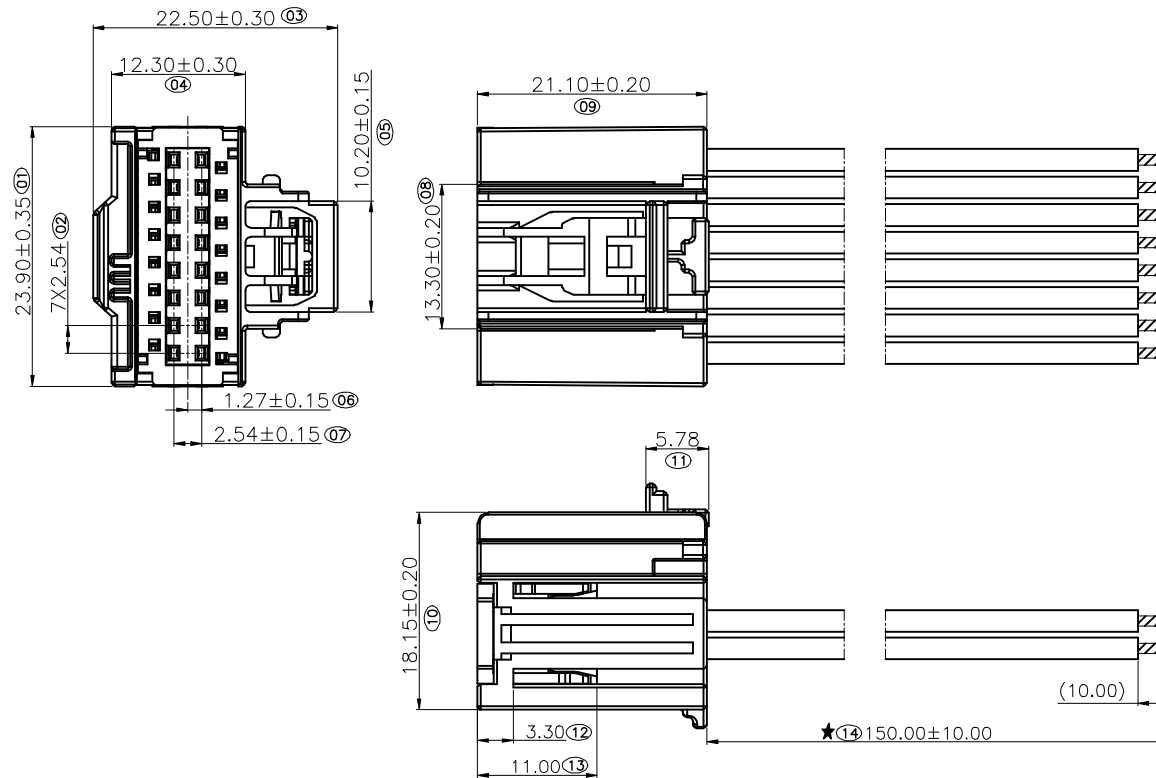

Specifications
 Current Rating: 3.0Amp.
 Insulation Resistance: 1000MΩMin.
 Dielectric Withstanding Voltage: 600VAC.
 Contact Resistance: 20mΩMax.
 Operating Temperature: -40°C to +105°C.

Materials
 Contact Material: Copper alloy
 Nickel underplated all over 50~100u" Tin plated 40~100u".
 Insulator Material: Temperature Thermoplastic, UL 94V-0 PBT or the equivalent material.

★ All materials must meet GREENCONN hazardous substances control standards.
 ★★: Critical Characteristics.
 indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications.
 ★★: Safety Features
 indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government.

Ordering Information

LZPH2XX - XX 0150 A 18

No. of Pins per Row Standard Plating
08

P4=Nickel underplated
over all 50~100u".
tin plated 40~100u" over all

Cable Length
0150=150mm

Wire Spec
18=18 AWG

Greenconn
 Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 5:1

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE

X. ±5.0'	X. ±0.30
.X' ±3.0'	.X ±0.25
.XX' ±2.0'	.XX ±0.15
.XXX' ±1.0'	.XXX ±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

LZPH208-CP40150A18

PART NO.

LZPH208-P40150A18

TITLE.

2.54 PITCH FEMALE
CONNECTOR