

1 2 3 4 5 6 7 8 9

F


E

D

C

B

A

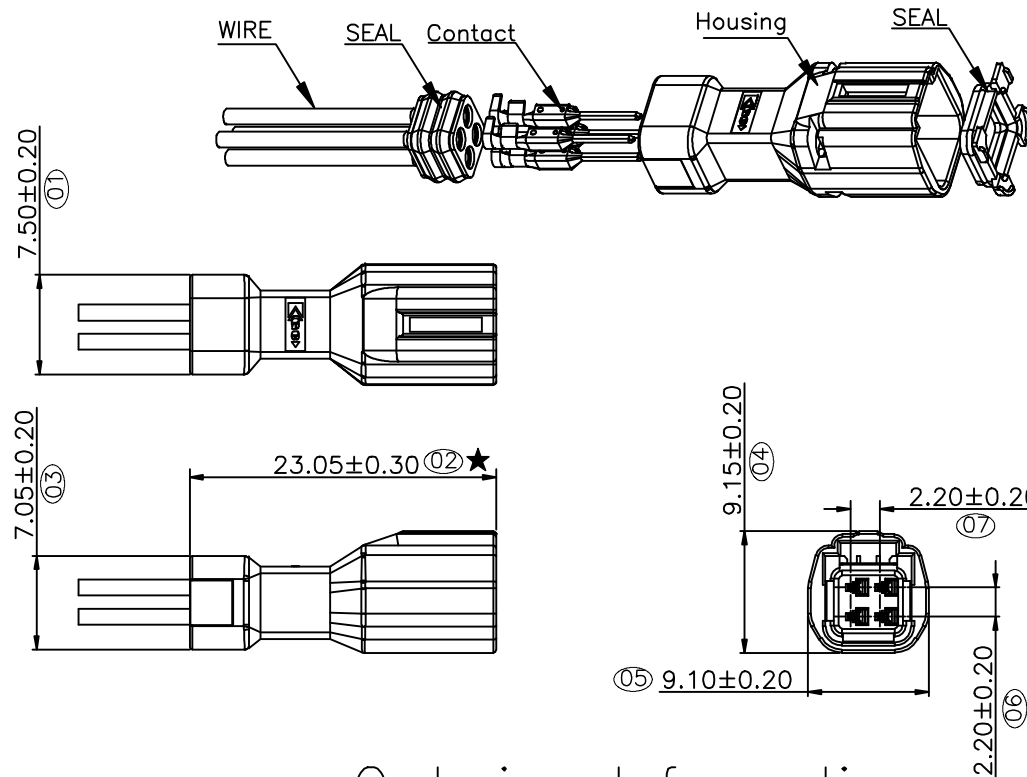

Specifications

Current Rating 20 AWG: 3.5Amp/PIN
22 AWG: 3.0Amp/PIN
24 AWG: 2.0Amp/PIN
26 AWG: 1.0Amp/PIN

Voltage Rating: 250V AC/DC.
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:650VAC
Contact Resistance:30mΩMax.
Operating Temperature:-40°C to +105°C

Materials
Insulator Material:
Contact:Copper alloy
Housing:Temperature Thermoplastic, UL 94V-0 PBT or the equivalent material
★ All materials must meet Greenconn hazardous substances control standards.
★: Critical Characteristics.
indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications
★: Safety Features
indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

Ordering Information

L ZZW202- R2 XXXX A 22


No. of Pins per row:02 Standard Plating R2=52~88u" Ni 40~120u" Sn Wire Length 100=0100 Form A=MALE Wire Specifications 20=20AWG 22=22AWG 24=24AWG 26=26AWG



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. B UNIT. mm SCALE. 3:2

3RD.ANG PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.'±3.0'	X.±0.30
.X'±2.0'	.X±0.25
.XX'±1.0'	.XX±0.20
.XXX'±0.5'	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

LZZW202-A

PART NO.

LZZW202-A

TITLE.

2.20Pitch 4Pin SEAL Series Male Cable

1 2 3 4 5 6 7 8 9