


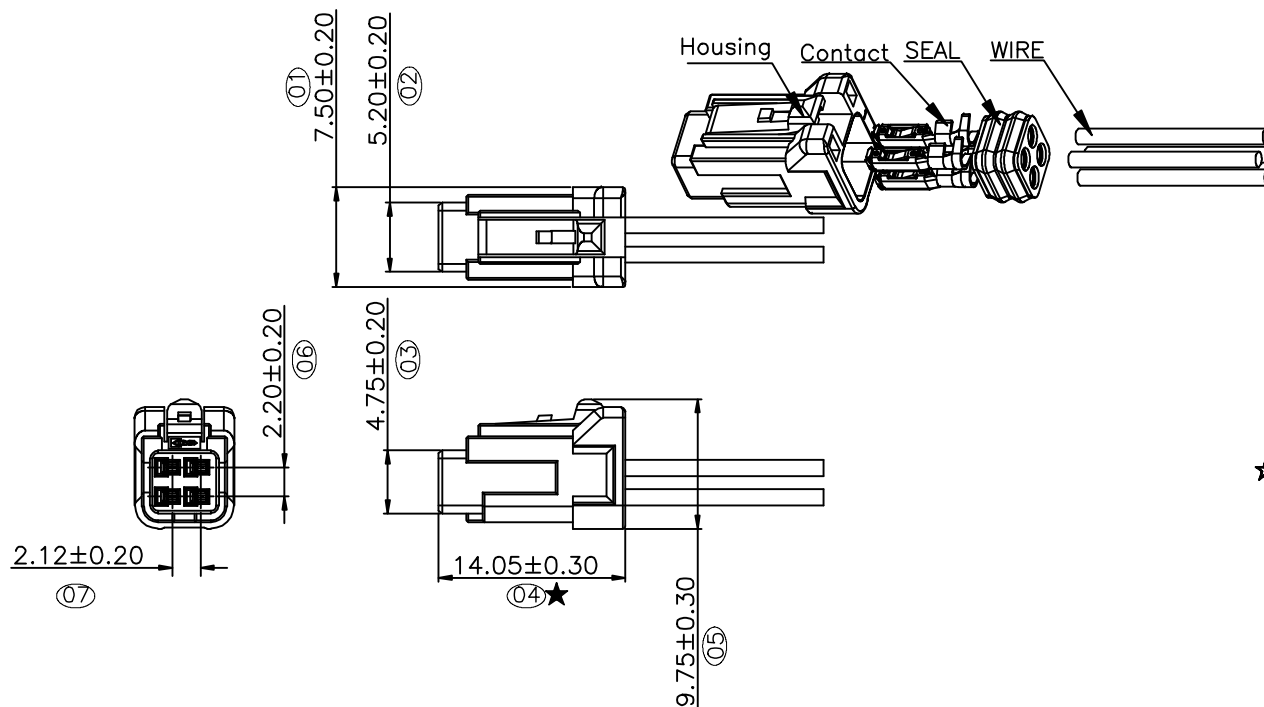

Specifications
 Current Rating 20 AWG: 5.0Amp/PIN
 22 AWG: 4.0Amp/PIN
 24 AWG: 3.5Amp/PIN
 26 AWG: 3.0Amp/PIN
 Voltage Rating: 250V AC/DC.
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:650VAC
 Contact Resistance:30mΩMax.
 Operating Temperature:-40°C to +105°C
Materials
 Insulator Material:
 Contact:Copper alloy
 Housing:Temperature Thermoplastic, UL 94V-0 PBT or the equivalent material
 ★ All materials must meet Greenconn hazardous substances control standards.
 ★★: Critical Characteristics.
 indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications
 ★★: Safety Features
 indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

Ordering Information

L ZZW202- R2 XXXX B XX

No. of Pins per row:02 Standard Plating R2=52~88u" Ni 40~120u" Sn Wire Length 100=0100 Form B=FEMALE Wire Specifications 20=20AWG 22=22AWG 24=24AWG 26=26AWG



REV. B UNIT. mm SCALE. 3:2

3RD.ANG PROJ.

 PAGE. 1/1

GENERAL TOLERANCE	
X.'±3.0'	X.±0.30
.X'±2.0'	.X±0.25
.XX'±1.0'	.XX±0.20
.XXX'±0.5'	.XXX±0.15

DESIGNED:
 CHECKED:
 APPROVED:

DATE:
 DATE:
 DATE:

DWG. NO. LZZW202-B
 PART NO. LZZW202-B

TITLE.
 2.20Pitch 4Pin SEAL Series Female Cable