


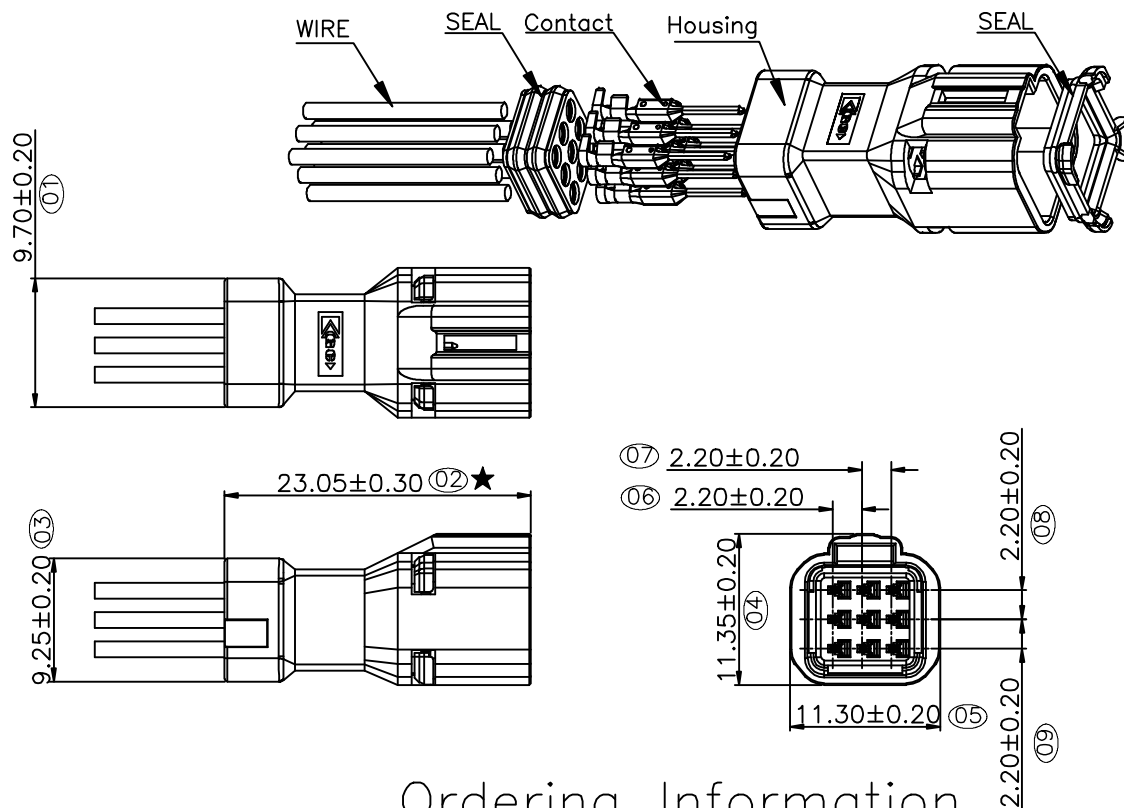

Specifications

Current Rating 20 AWG: 3.5Amp/PIN
22 AWG: 3.0Amp/PIN
24 AWG: 2.0Amp/PIN
26 AWG: 1.0Amp/PIN

Voltage Rating: 250V AC/DC.
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:650VAC
Contact Resistance:30mΩMax.
Operating Temperature:-40°C to +105°C

Materials

Insulator Material:
Contact:Copper alloy
Housing:Temperature Thermoplastic, UL 94V-0 PBT or the equivalent material

★ All materials must meet Greenconn hazardous substances control standards.

★★: Critical Characteristics.

indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications

★: Safety Features

indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

Ordering Information

L ZZW303- R2 XXXX A XX

No. of Pins per row:03 Standard Plating R2=52~88u" Ni 40~120u" Sn Wire Length 100=0100 Form A=MALE Wire Specifications 20=20AWG 22=22AWG 24=24AWG 26=26AWG



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. B UNIT. mm SCALE. 3:2

3RD.ANG PROJ.

PAGE. 1/1

GENERAL TOLERANCE

X.'±3.0'	X.±0.30
.X'±2.0'	.X±0.25
.XX'±1.0'	.XX±0.20
.XXX'±0.5'	.XXX±0.15

DESIGNED:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

DWG. NO.

LZZW303-A

PART NO.

LZZW303-A

TITLE.

2.20Pitch 9Pin SEAL Series Male Cable