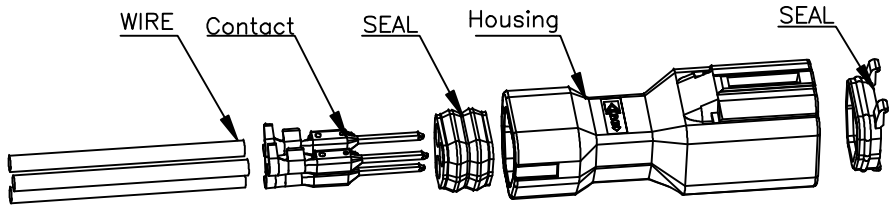

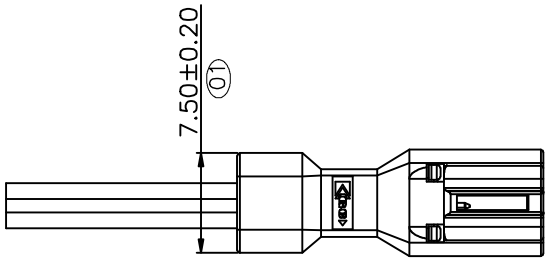

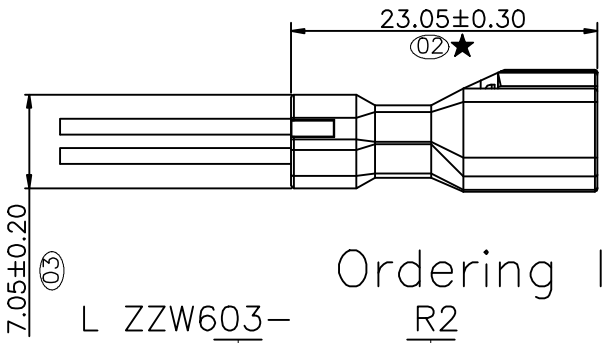

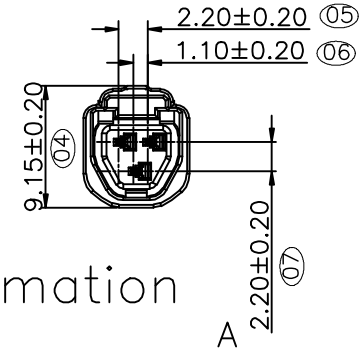

Specifications

Current Rating 20 AWG: 3.5Amp/PIN
22 AWG: 3.0Amp/PIN
24 AWG: 2.0Amp/PIN
26 AWG: 1.0Amp/PIN

Voltage Rating: 250V AC/DC.
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:650VAC
Contact Resistance:30mΩMax.
Operating Temperature:−40°C to +105°C

Materials
Insulator Material:
Contact:Copper alloy
Housing:Temperature Thermoplastic, UL 94V−0 PBT or the equivalent material
☆ All materials must meet Greenconn hazardous substances control standards.

"★": Critical Characteristics.
indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications

"☆": Safety Features
indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

Ordering Information

L ZZW603− R2 XXXX A XX

- ZZW603−: No. of Pins :03
- R2: Standard Plating R2=52~88u'' Ni 40~120u" Sn
- XXXX: Wire Length 100=0100
- A: Form A=MALE
- XX: Wire Specifications 20=20AWG 22=22AWG 24=24AWG 26=26AWG

Greenconn Website:www.greenconn.com E-mail:sales@greenconn.com	3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. LZZW603−A	TITLE. 2.20Pitch 3Pin SEAL Series MALE Cable
		X.°±3.0°	X.±0.30	CHECKED:	DATE:		
		.X°±2.0°	.X±0.25			PART NO. LZZW603−A	
		.XX°±1.0°	.XX±0.20	APPROVED:	DATE:		
REV. B / UNIT. mm / SCALE. 3:2	PAGE. 1/1	.XXX°±0.5°	.XXX±0.15				