

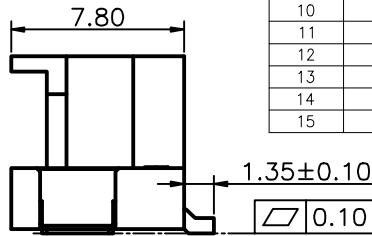
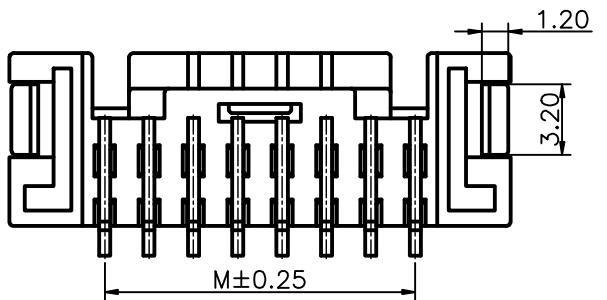
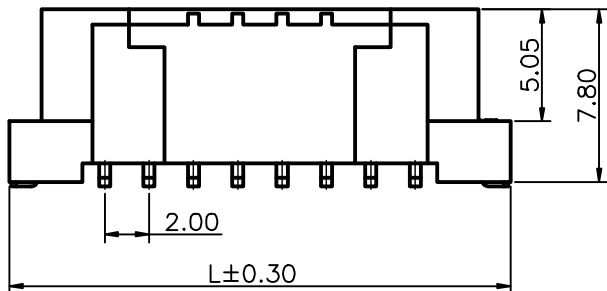


1 2 3 4 5 6 7 8 9


F
E
D
C
B
A

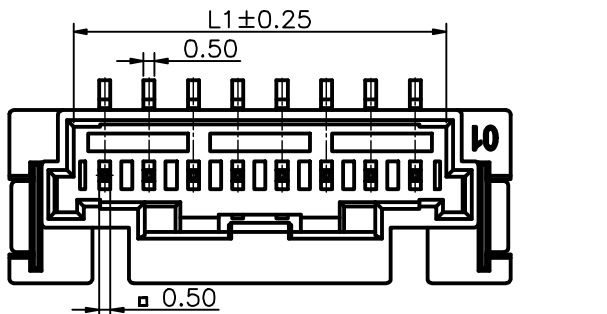

No. of PIN/ROW	Dimension Information		
	M	L	L1
02	2.00	10.90	4.80
03	4.00	12.60	6.80
04	6.00	14.60	8.80
05	8.00	16.60	10.80
06	10.00	18.60	12.80
07	12.00	20.60	14.80
08	14.00	22.60	16.80
09	16.00	24.60	18.80
10	18.00	26.60	20.80
11	20.00	28.60	22.80
12	22.00	30.60	24.80
13	24.00	32.60	26.80
14	26.00	34.60	28.80
15	28.00	36.60	30.80

Specifications
 Contact resistance: $\leq 25m\Omega$
 Insulation resistance: $\geq 1000M\Omega$
 Rated voltage: 125V AC/DC
 Rated current: 3.0A AC/DC
 Withstanding Voltage: 1000V AC/minute
 Temperature Range: $-40^{\circ}C - +125^{\circ}C$
Materials
 Contacts: Phosphor Bronze/Matte Sn
 Solder Tabs: Brass/Matte Sn
 Housing: PA9T with glass fill, UL 94 V-0, Natural colour
 All materials must meet GREENCONN hazardous substances control standards.

Recommended P.C.Board Layout
 N=Circuit(Tolerance:±0.05)

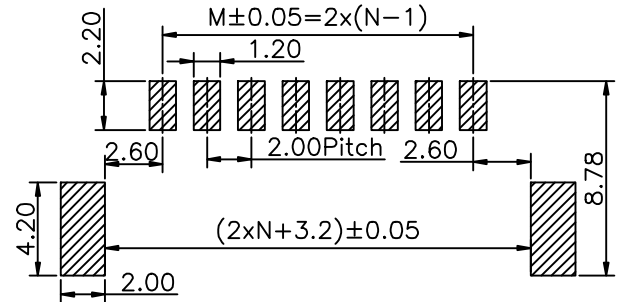


Scale: 2:1

Ordering Information

WF19-BFC001- 1 X XX - Q2 D 5 A N

No. of Pos. per Row: 02~15
 Standard Plating: Q2=Matte Tin 90~120u"•
 Insulator Material: D=NYLON-9T
 Color: 5=Natural
 Contact Material: A=Phosphor Bronze
 Standard Packing: N=PE bag

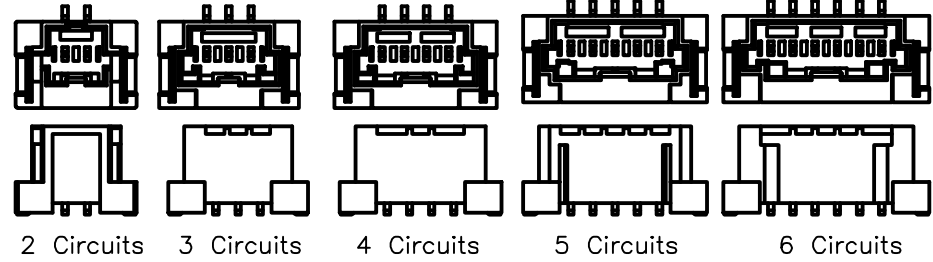

REV. A UNIT. mm SCALE. 10:3 PAGE. 1/1

3RD.ANG PROJ.

 PAGE. 1/1

GENERAL TOLERANCE	
X.±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED: _____ DATE: _____
 CHECKED: _____ DATE: _____
 APPROVED: _____ DATE: _____

DWG. NO. WF19-BFC001-C1
 PART NO. WF19-BFC001-1XXX-Q2D5AN

TITLE. 2.0mm MidClik Vertical Male Connector

1 2 3 4 5 6 7 8 9