

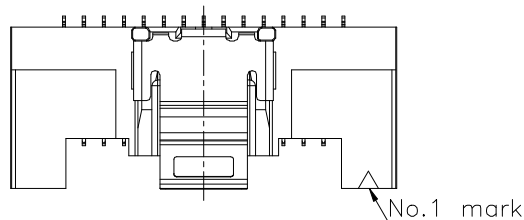


3D VIEW

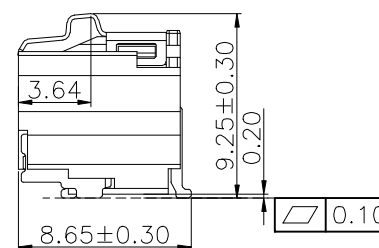


No. of Contacts(N)	Dimension Information	
	L	M
20	14.35	9.00
30	19.35	14.00
40	24.35	19.00
50	29.35	24.00

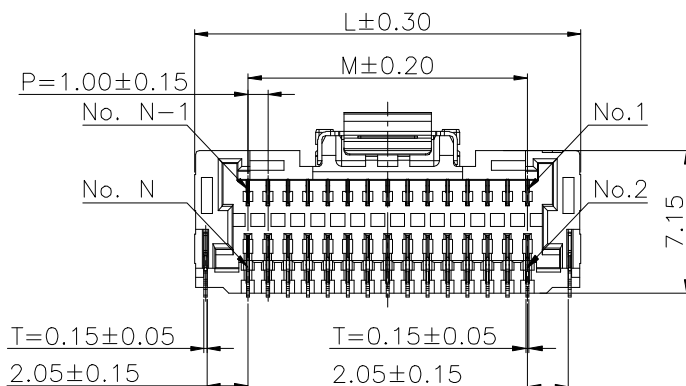

Specifications

Current Rating: 1.0Amp/Pin AC/DC
 Voltage Rating: 100V AC/DC.
 Insulation Resistance: 500MΩ Min.
 Dielectric Withstanding Voltage: 300V AC.
 Contact Resistance: 30mΩ Max.
 Operating Temperature: -35°C to +85°C.
 Contact Material: Brass.
 Retention Tab Material: Brass.
 Lock Metal Material: Stainless Steel.
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material.
 All materials must meet Greenconn hazardous substances control standards.

Recommended P.C.Board Layout (Tolerance:±0.05)

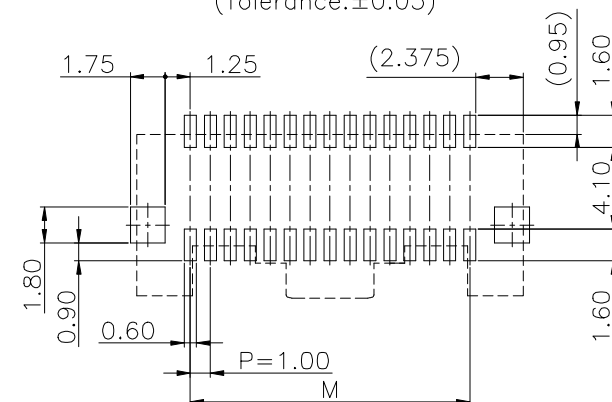

Ordering Information

WF28-DCD001-2X XX - 07

No. Of Pins Per Row Standard Plating Insulator Material Color Contact Material Standard Packing
 10/15/20/25 07=Gold plating 2μ Min. C=LCP 1=Black B=Brass D=Tape&Reel



Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV. B01 UNIT. mm SCALE. 3:1

3RD.ANG
 PROJ.
 PAGE. 1/1

GENERAL TOLERANCE

X'±5.0'	X±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

WF28-DCD001-C2

PART NO.

WF28-DCD001-2XXX-07C1BD

TITLE.

1.00mm pitch double row
 right angle pin header