
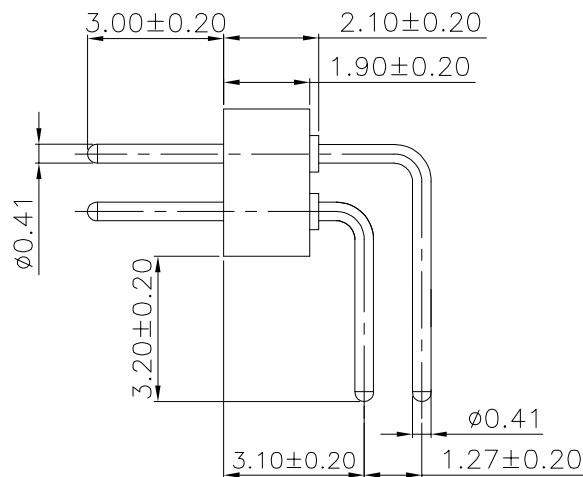


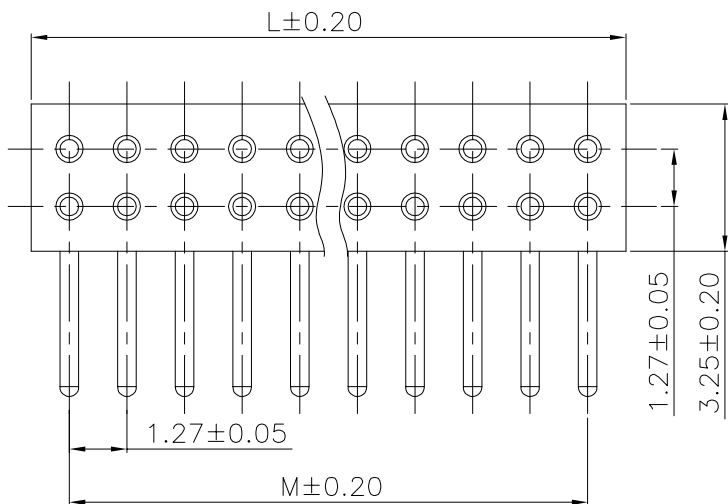

No. of PIN/ROW	M	L
01	0	1.68
02	1.27	2.95
03	2.54	4.22
04	3.81	5.49
05	5.08	6.76
06	6.35	8.03
07	7.62	9.30
08	8.89	10.57
09	10.16	11.84
10	11.43	13.11
11	12.70	14.38
12	13.97	15.65
13	15.24	16.92
14	16.51	18.19
15	17.78	19.46
16	19.05	20.73
17	20.32	22.00
18	21.59	23.27
19	22.86	24.54
20	24.13	25.81
21	25.40	27.08
22	26.67	28.35
23	27.94	29.62
24	29.21	30.89
25	30.48	32.16
26	31.75	33.43
27	33.02	34.70
28	34.29	35.97
29	35.56	37.24
30	36.83	38.51
31	38.10	39.78
32	39.37	41.05
33	40.64	42.32
34	41.91	43.59
35	43.18	44.86
36	44.45	46.13
37	45.72	47.40
38	46.99	48.67
39	48.26	49.94
40	49.53	51.21

Ordering Information

GKEB202 - XX XX A 001 S X B X

No. Of Pins Per Row
01~40

Standard Plating
01=Tin
02=Gold Flash
B1=Gold 3u"

Color
1=Black

Standard Packing
C=Tube
N=PE Bag

Specifications

Current Rating:3A

Dielectric Withstanding Voltage: 1000V RMS

Contact Resistance: 10mΩ Max.

Materials

Contact Material: Brass

Insulator Material:PPS,UL 94V-0

All materials must meet Greenconn
hazardous substances control standards.



3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.*±3"	X.±/
.X.*±3"	.X±0.30
.XX.*±3"	.XX±0.25
.XXX.*±3"	.XXX±0.20

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
GKEB202-CA001SB
PART NO.
GKEB202-XXXXA001SXBX

TITLE.
1.27mm PIN
R/A TYPE CONNECTOR