

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A

F


E

D

C



B

A

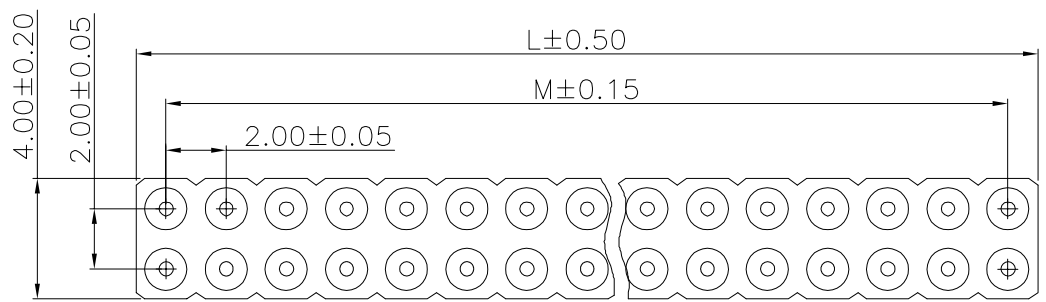

Specifications
Current Rating:2 A
Dielectric Withstanding Voltage: 500V RMS
Contact Resistance: 10mΩ Max.
Materials
Contact Material: Brass
Insulator Material:PPS,UL 94V-0
All materials must meet Greenconn hazardous substances control standards.

No. of PIN/ROW	M	L
01	0	2.00
02	2.00	4.00
03	4.00	6.00
04	6.00	8.00
05	8.00	10.00
06	10.00	12.00
07	12.00	14.00
08	14.00	16.00
09	16.00	18.00
10	18.00	20.00
11	20.00	22.00
12	22.00	24.00
13	24.00	26.00
14	26.00	28.00
15	28.00	30.00
16	30.00	32.00
17	32.00	34.00
18	34.00	36.00
19	36.00	38.00
20	38.00	40.00
21	40.00	42.00
22	42.00	44.00
23	44.00	46.00
24	46.00	48.00
25	48.00	50.00
26	50.00	52.00
27	52.00	54.00
28	54.00	56.00
29	56.00	58.00
30	58.00	60.00
31	60.00	62.00
32	62.00	64.00
33	64.00	66.00
34	66.00	68.00
35	68.00	70.00
36	70.00	72.00
37	72.00	74.00
38	74.00	76.00
39	76.00	78.00
40	78.00	80.50

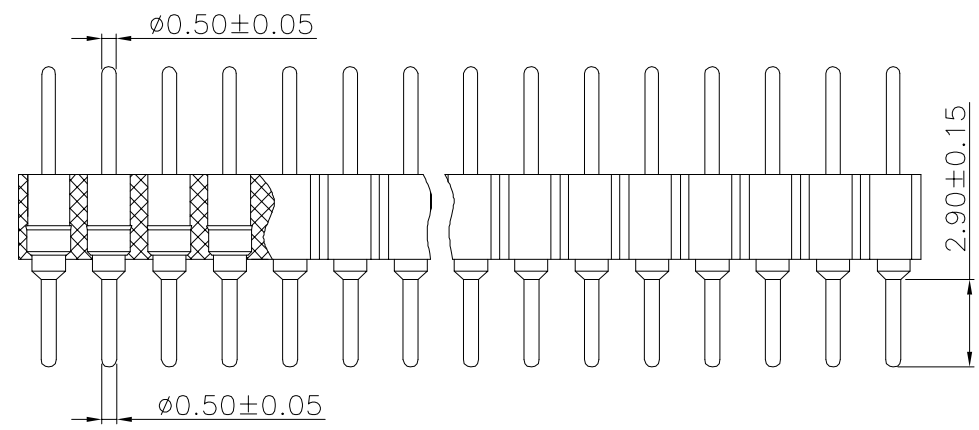

Ordering Information


GKFA201 - XX XX A 003 S X B X

No. Of Pins Per Row
01~40

Standard Plating
01=Tin
02=Gold Flash
B1=Gold 3u'

Color
1=Black

Standard Packing
C=Tube
N=PE Bag

 Website:www.greenconn.com E-mail:sales@greenconn.com			3RD.ANG PROJ.  PAGE. 1/1	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. GKFA201-CA003SB PART NO. GKFA201-XXXXA003SXBX	TITLE. 2.00mm PIN Connector DIP Type
REV. A	UNIT. mm	SCALE. 1:1		X.±3'	X.±/	CHECKED:	DATE:		
				.XX±3'	.XX±0.25	APPROVED:	DATE:		
				.XXX±3'	.XXX±0.20				

1 2 3 4 5 6 7 8 9