

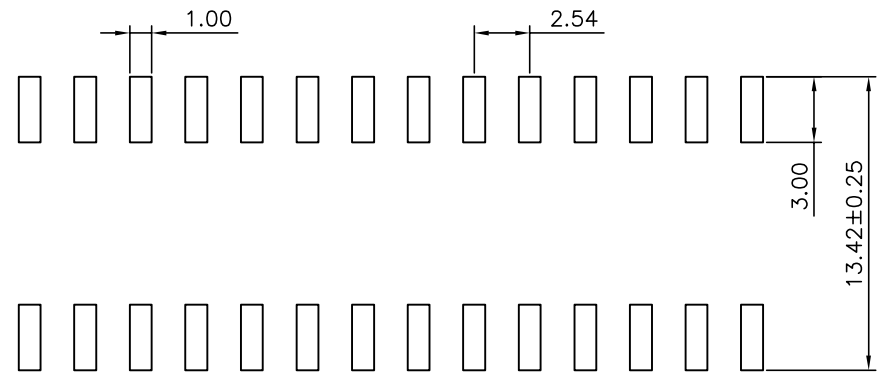
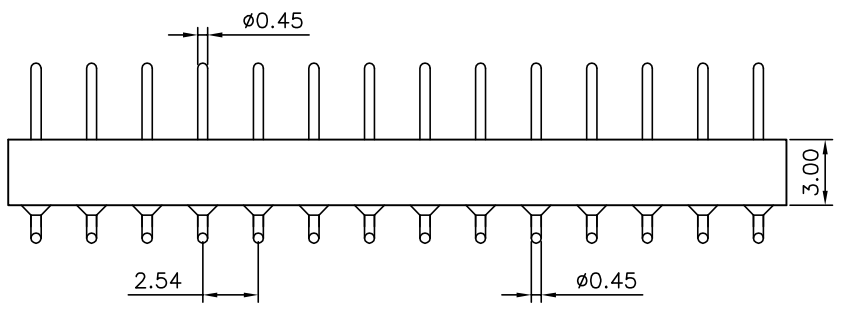


F
E
D
C
B
A

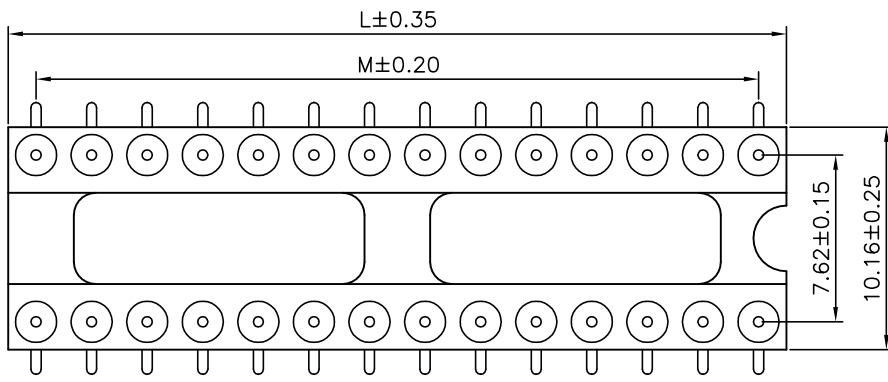

P.C.B LAYOUT

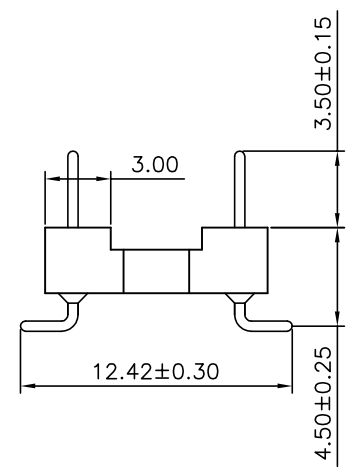

Material:
Pin: Brass,machined CuZn38Pb2
Insulator black(housing): PPS (UL94V-0)
Electrical:
Current rating: 3Amps/contact max.
Contact resistance: ≤4mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Operating voltage: 60VAC/DC
Mechanical:
Operating temperatures: Gold Plated: -55°C to +105°C
Tin plated: -40°C to +105°C
Soldering temperature: +260°C, 10s max
All materials must meet GREENCONN hazardous substances control standards.

No. Of Pins Per Row	L	M
03	7.62	5.08
04	10.16	7.62
05	12.70	10.16
07	17.78	15.24
08	20.32	17.78
09	22.86	20.32
10	25.40	22.86
12	30.48	27.94
14	35.56	33.02
16	40.64	38.10
20	50.80	48.26
24	60.96	58.42

Ordering Information

GKHC203 - XX XX A 001 S X B X

No. Of Pins Per Row
03~05.07~10.12.14.16.20.24


Standard Plating
01=Tin
02=Gold Flash

Color
1=Black

Standard Packing
D=T&R


Website: www.greenconn.com
E-mail: sales@greenconn.com

REV.	UNIT.	SCALE.
A	mm	1:1

3RD.ANG
PROJ.

PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.50
.X*±3.0°	.X±0.30
.XX*±2.0°	.XX±0.20
.XXX*±1.0°	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
GKHC203-CA001SB
PART NO.
GKHC203-XXXXA001SXBX

TITLE.
2.54mmPitch IC Sockets Straight DIP Spacing 7.62mm Pin Length 10.0mm

1 2 3 4 5 6 7 8 9