
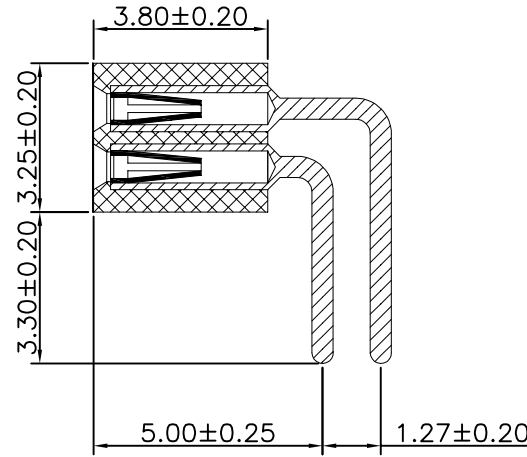


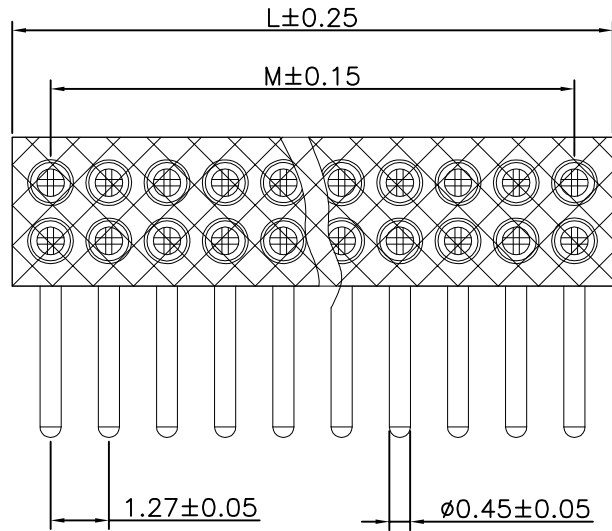

Specifications
 Rated current: 1 A
 Contact resistance: max 20m Ω
 Dielectric strength: min 500 V RMS
 Mating pins: Outside Diameter 0.31 to 0.48 mm
 Forces: (polished steel gauge 0.38 mm)
 Insertion: 80g max(单PIN)
 Withdrawal: 15g max(单PIN)
 Materials
 Contact Material: Brass
 Insulation Material: High Temperature Thermoplastic UL94V-0 PPS
 All materials must meet GREENCONN hazardous substances control standards.

Ordering Information

C KEB202 - XX XX A 002 S X B X

No. of Pins per Row 01~50
 Standard Plating 01=Tin 05=Gold Flash/Tin
 Color 1=Black
 Standard Packing C=Tube N=PE bag

No. of PIN/ROW	M	L
01	0	1.68
02	1.27	2.95
03	2.54	4.22
04	3.81	5.49
05	5.08	6.76
06	6.35	8.03
07	7.62	9.30
08	8.89	10.57
09	10.16	11.84
10	11.43	13.11
11	12.70	14.38
12	13.97	15.65
13	15.24	16.92
14	16.51	18.19
15	17.78	19.46
16	19.05	20.73
17	20.32	22.00
18	21.59	23.27
19	22.86	24.54
20	24.13	25.81
21	25.40	27.08
22	26.67	28.35
23	27.94	29.62
24	29.21	30.89
25	30.48	32.16
26	31.75	33.43
27	33.02	34.70
28	34.29	35.97
29	35.56	37.24
30	36.83	38.51
31	38.10	39.78
32	39.37	41.05
33	40.64	42.32
34	41.91	43.59
35	43.18	44.86
36	44.45	46.13
37	45.72	47.40
38	46.99	48.67
39	48.26	49.94
40	49.53	51.21
41	50.80	52.48
42	52.07	53.75
43	53.34	55.02
44	54.61	56.29
45	55.88	57.56
46	57.15	58.83
47	58.42	60.10
48	59.69	61.37
49	60.96	62.64
50	62.23	63.91



3RD. ANG PROJ.
 PAGE. 1/1

GENERAL TOLERANCE	
X.*±3.0°	X.*±/
.X.*±/	.X.*±0.30
.XX.*±/	.XX.*±0.25
.XXX.*±/	.XXX.*±0.20

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
 CKEB202-CA002SB
 PART NO.
 CKEB202-XXXX A002SXBX

TITLE.
 1.27mm SIP Socket
 Right Angle Type