


F
E
D
C
B
A
AV

1 2 3 4 5 6 7 8 9

Specifications
Rated current: 2 A
Contact resistance: max 20m Ω
Dielectric strength: min 300 V RMS
Mating pins: Outside Diameter 0.38 to 0.56 mm
Forces: (polished steel gauge 0.46 mm)
Insertion: 2.0 N typ
Withdrawal: 0.6 N typ
Materials
Contact Material:Brass
Insulation Material:High Temperture
Thermoplastic UL94V-0 PPS
All materials must meet GREENCONN
hazardous substances control standards.

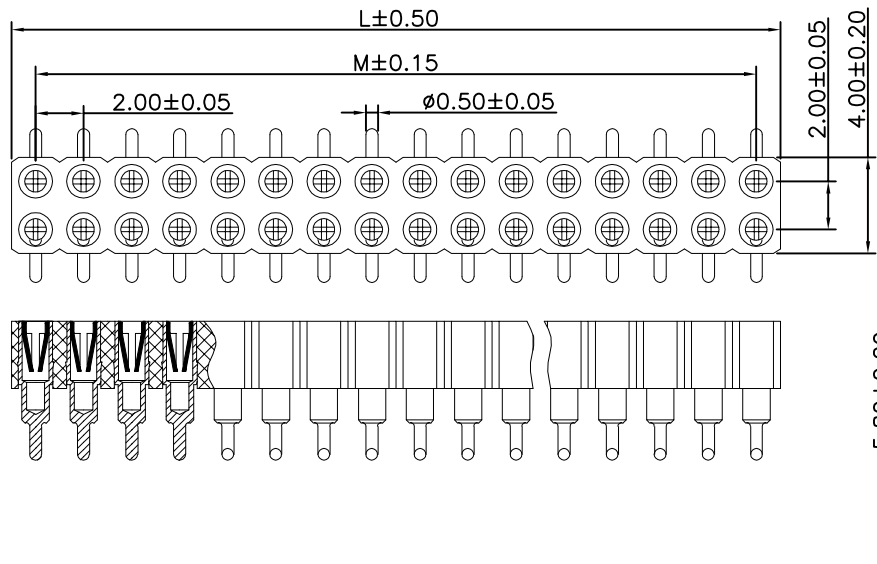


No. of PIN/ROW	M	L
01	0	2.00
02	2.00	4.00
03	4.00	6.00
04	6.00	8.00
05	8.00	10.00
06	10.00	12.00
07	12.00	14.00
08	14.00	16.00
09	16.00	18.00
10	18.00	20.00
11	20.00	22.00
12	22.00	24.00
13	24.00	26.00
14	26.00	28.00
15	28.00	30.00
16	30.00	32.00
17	32.00	34.00
18	34.00	36.00
19	36.00	38.00
20	38.00	40.00
21	40.00	42.00
22	42.00	44.00
23	44.00	46.00
24	46.00	48.00
25	48.00	50.00
26	50.00	52.00
27	52.00	54.00
28	54.00	56.00
29	56.00	58.00
30	58.00	60.00
31	60.00	62.00
32	62.00	64.00
33	64.00	66.00
34	66.00	68.00
35	68.00	70.00
36	70.00	72.00
37	72.00	74.00
38	74.00	76.00
39	76.00	78.00
40	78.00	80.00

Ordering Information

C KFC202 - XX XX A 001 S X B X

No. of Pins per Row 01~40
Standard Plating 01=Tin 05=Gold Flash/Tin
Color 1=Black
Standard Packing D=T&R

 Website:www.greenconn.com E-mail:sales@greenconn.com			3RD.ANG PROJ.  PAGE. 1/1	GENERAL TOLERANCE		DESIGNED: CHECKED: APPROVED:	DATE: DATE: DATE:	DWG. NO. CKFC202-CA001SB PART NO. CKFC202-XXXX A001SXBX	TITLE. 2.00mm SIP Socket H=2.80mm S.M.T
REV. A	UNIT. mm	SCALE. 1:1		X.*±3.0'	X.±/				
				.X*±/	.X±0.30				
				.XX*±/	.XX±0.25				
				.XXX*±/	.XXX±0.20				

1 2 3 4 5 6 7 8 9