

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A

F


E

D

C


B

A

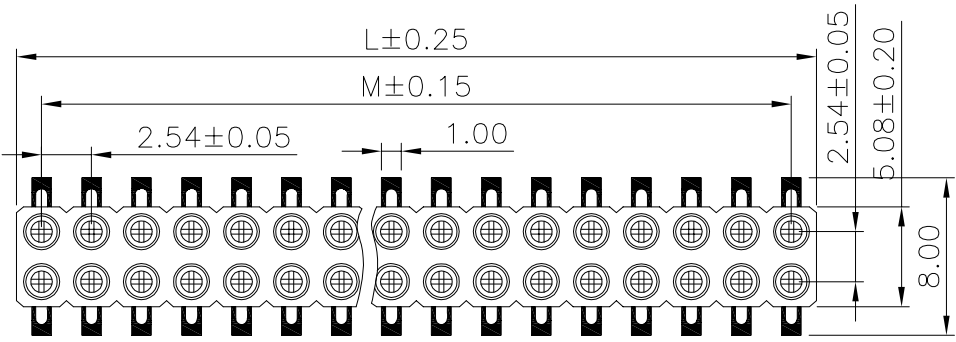

Specifications
Current Rating:3A
Dielectric Withstanding Voltage: 1000V RMS
Contact Resistance: 10mΩ Max.
Materials
Contact Material: Brass
Insulator Material:PPS,UL 94V-0
Contact clip: Beryllium copper(C17200)
Mating pins:Outside Diameter 0.64 to 0.90mm
Forces:(polished steel gauge Ø0.76mm
Insertion: 1.2N tyo.
Withdrawal: 0.6N typ.
Coplanarity SMD terminations: 0.1mm Max.
Mechanical life:500 cycels Min.
All materials must meet Greenconn
hazardous substances control standards.

No. of PIN/ROW	M	L
01	0	2.34
02	2.54	4.88
03	5.08	7.42
04	7.62	9.96
05	10.16	12.50
06	12.70	15.04
07	15.24	17.58
08	17.78	20.12
09	20.32	22.66
10	22.86	25.20
11	25.40	27.74
12	27.94	30.28
13	30.48	32.82
14	33.02	35.36
15	35.56	37.90
16	38.10	40.44
17	40.64	42.98
18	43.18	45.52
19	45.72	48.06
20	48.26	50.60
21	50.80	53.14
22	53.34	55.68
23	55.88	58.22
24	58.42	60.76
25	60.96	63.30
26	63.50	65.84
27	66.04	68.38
28	68.58	70.92
29	71.12	73.46
30	73.66	76.00
31	76.20	78.54
32	78.74	81.08
33	81.28	83.62
34	83.82	86.16
35	86.36	88.70
36	88.90	91.24
37	91.44	93.78
38	93.98	96.32
39	96.52	98.86
40	99.06	101.6

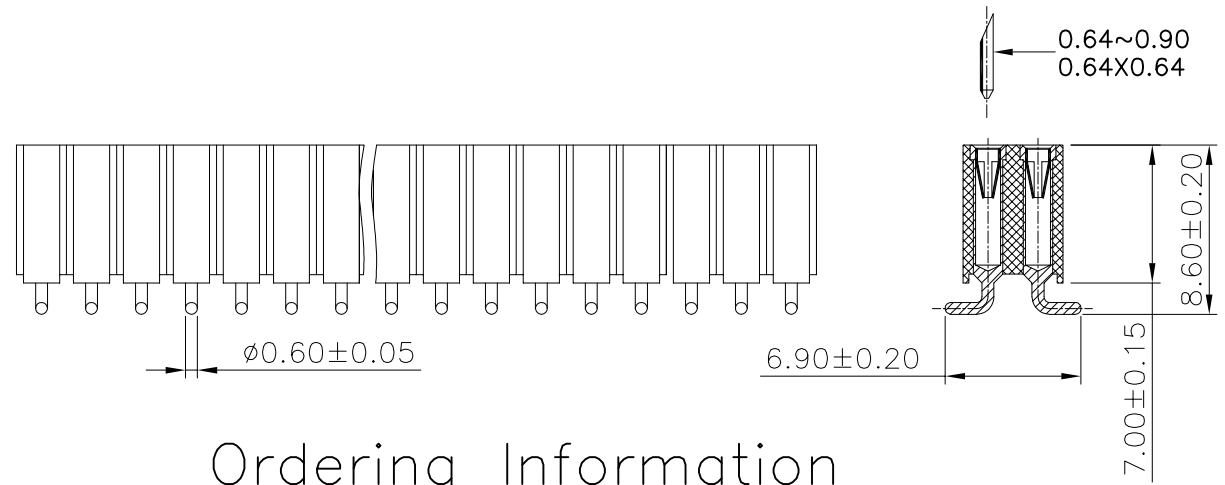

Ordering Information


CKHC201 - XX XX A 002 S X B X

No. Of Pins Per Row 01~40

Standard Plating 01=Tin 02=Gold Flash 05=Gold Flash/Tin

Color 1=Black

Standard Packing D=T&R

 Website:www.greenconn.com E-mail:sales@greenconn.com			3RD.ANG PROJ.  PAGE. 1/1	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. CKHC201-CA002SB	TITLE. 2.54mm SIP Socket Dououble ROW S.M.T TYPE CONNECTOR
REV. A	UNIT. mm	SCALE. 1:1		X.*±3'	X.±0.30	CHECKED:	DATE:		
				.X*±3'	.X±0.25	APPROVED:	DATE:		
				.XX*±3'	.XX±0.20			PART NO. CKHC201-XXXXA002SXBX	
				.XXX±3'	.XXX±/				

AV 1 2 3 4 5 6 7 8 9