

1 2 3 4 5 6 7 8 9

F






E

D


C

B

A

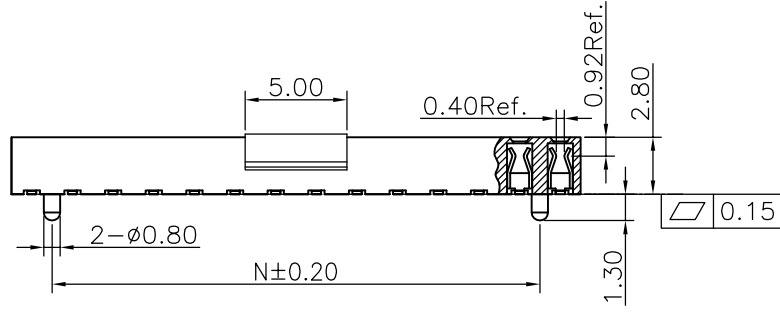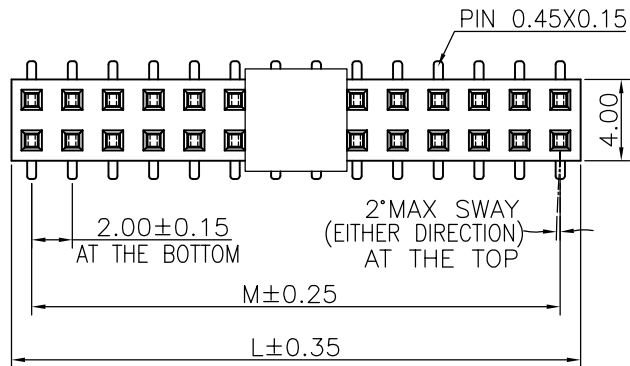

Recommended P.C.Board Layout
(Tolerance:±0.05)

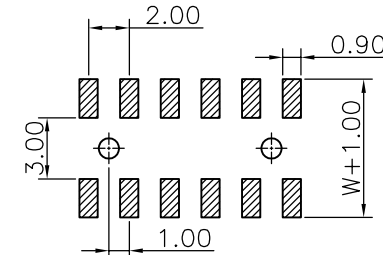

Specifications
Current Rating:2.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:
Nylon(High temperature resistance),
LCP(High temperature resistance),
UL 94V-0
All materials must meet Greenconn
hazardous substances control standards.

Ordering Information

CSFC205 - XX XX X XXX C 1 S X

Plastic specifications
1=Single row
2=Dual row
3=Tripe row
4=Quadruple

Water code

No. of Pins per Row
02~35

Positioning column information
A=No locating post
B=Round post
C=Square post
D=Cross post

Pin length
See the drawing

Insulator Material
R=Nylon(Halogen Free)
C=LCP

Color
1=Black
2=White
3=Yellow
E=Beige

Contact Material
A/S/K/T=Phosphor Bronze

Packing code
A=Box
B=Tray
C=Tube
D=Tape&Reel
E=Cap+Tube
F=Cap+Tape&Reel
G=Acetate Tape+Tube
H=Acetate Tape+Tape&Reel

No. of PIN/ROW	Dimension Information		
	M	L	N
02	2.00	4.00	--
03	4.00	6.00	2.00
04	6.00	8.00	4.00
05	8.00	10.00	6.00
06	10.00	12.00	8.00
07	12.00	14.00	10.00
08	14.00	16.00	12.00
09	16.00	18.00	14.00
10	18.00	20.00	16.00
11	20.00	22.00	18.00
12	22.00	24.00	20.00
13	24.00	26.00	22.00
14	26.00	28.00	24.00
15	28.00	30.00	26.00
16	30.00	32.00	28.00
17	32.00	34.00	30.00
18	34.00	36.00	32.00
19	36.00	38.00	34.00
20	38.00	40.00	36.00
21	40.00	42.00	38.00
22	42.00	44.00	40.00
23	44.00	46.00	42.00
24	46.00	48.00	44.00
25	48.00	50.00	46.00
26	50.00	52.00	48.00
27	52.00	54.00	50.00
28	54.00	56.00	52.00
29	56.00	58.00	54.00
30	58.00	60.00	56.00
31	60.00	62.00	58.00
32	62.00	64.00	60.00
33	64.00	66.00	62.00
34	66.00	68.00	64.00
35	68.00	70.00	66.00

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE				DESIGNED:	DATE:	DWG. NO. CSFC205-CXX	TITLE. 2.00 FEMALE HEADER DUAL ROWS SMT TYPE CONNECTOR
REV.	UNIT.	SCALE.	PAGE.				
01	mm	3:1	1/1				
				CHECKED:	DATE:	PART NO. CSFC205-XXXX XXXX X1SX	
				CO SIGNED:	DATE:		
				APPROVED:	DATE:		

1 2 3 4 5 6 7 8 9